
BT8373

SYSTEM X


Universal Curved Videowall Stand

Installation Guide

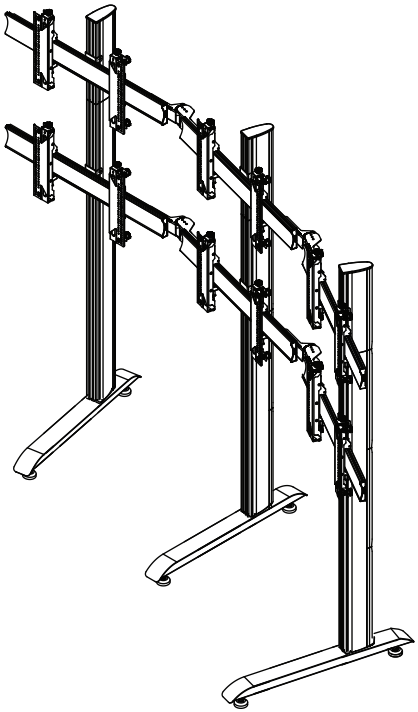

- Recommended screen size: 32”- 75”
- Max weight per screen: 50kg (110lbs)
- Suitable for landscape or portrait mounting
- Angle up to +/-45° to create a curved videowall
- All mounting hardware included

Note: This assembly manual covers different installations. Some parts or procedures shown may not be required for installation.




Please refer to page 5 for VESA® fixings

Contents

	Pg
Installation Safety Notes	2
Parts List	4
Typical Installation	6
Max Load Configurations	6
Installation Instructions	7
Product Dimensions	23
B-Tech Contact Details	24

BT8373



Installation & Operating Safety Instructions

Caution: This mount is intended for use only with the maximum weights indicated. Use with equipment heavier than the maximum indicated may result in instability causing possible injury.

Do not attempt to install this product until all instructions and warnings have been read and properly understood. *Please keep these instructions for future reference.*

Please check carefully to make sure there are no missing or defective parts - defective parts must never be used. B-Tech AV Mounts, its distributors and dealers are not liable or responsible for damage or injury caused by improper installation, improper use or failure to observe these safety instructions. In such cases, all guarantees will expire.

General

B-Tech AV Mounts recommends that a professional AV installer or other suitably qualified person install this product. Great care must always be taken during installation as most AV equipment is of a fragile nature, possibly heavy and easily damaged if dropped. If you do not fully understand the instructions or are not sure how to install this product safely, then please consult a professional for advice and/or to install this product for you. Failure to mount this product correctly may cause serious injury or death both during installation and at any time thereafter. Do not mount any AV equipment that exceeds the specific weight limit of the product you are installing. This weight limit will be clearly stated on each product and its packaging and will vary from product to product.

Product location

Please pay careful attention to where this product is located. Designed for indoor use, this stand is suitable for public or home installation. Check load capacity of the floor prior to installation to ensure that it can support the combined weight of the equipment and hardware, some surfaces are not suitable for installation.

When verifying the stability of the structure, consider the following external factors: The strength of the floor, exposure to sudden and severe wind and danger arising from contact with people and / or objects (eg installations in passageways, emergency exits), if located in a public or frequently populated area ensure that the product is out of the immediate reachof people. When drilling holes it is essential to avoid contact with electrical cables and water or gas pipes contained within. Use of a good quality live wire detector and hidden object locator is therefore recommended. Only drill into structures when you are sure it is safe to do so.

Fixing hardware

It is highly recommended that all fixing screws be used where supplied and that the purpose of all other fixing hardware is fully understood. In some cases more AV equipment fixing hardware will be supplied to accommodate different models of equipment and set up configurations. The installer must be satisfied that any supplied fixing hardware is suitable for each specific installation. The fixing kit supplied with the product may not be suitable. If any fixing screws or included hardware are deemed not sufficient for a safe installation then please consult a professional or your local hardware store.

Hazard limitation

When routing cables take advantage of any built in cable management features that the product might provide and ensure that all cables are tidy and secure. Check to see that any moving aspect of the product can do so unhindered by any cabling. Some products have moving parts and the potential to cause injury through the crushing or trapping of fingers or other body parts. Particular attention to the nature of moving parts is required especially when assembling installing and adjusting during set up. Immediately after installation double-check that the work done is safe and secure. Double-check all necessary fixings are present and are of ample tightness. It is recommended that periodic inspections of the product and its fixing points are made as frequently as possible (no more than 6 months apart) to ensure that safety is maintained. If in doubt consult a professional AV installer or other suitably qualified person.

CN B-Tech AV Mounts 建议本产品由专业AV安装人员或其他合格人员安装。 B-Tech AV Mounts 及它的代理商、经销商不对由于不恰当的安装而造成的损失或伤害负责。 本产品必须安装在合适的架构上，并仅用于不超过所标示的最大承重。

CS Společnost B-Tech AV Mounts doporučuje provést instalaci tohoto produktu instalátora AV či jinak způsobilé osoby. Společnost B-Tech AV Mounts, její distributoři a prodejci nenesou prostřednictvím odborného odpov ědnost za škody nebo zranění zp ůsobená nevhodnou instalací. Tento výrobek je nutno umístit do vhodné konstrukce a používat jen po uvedenou maximální výšku.

DE B-Tech AV Mounts empfiehlt, dass dieses Produkt durch einen qualifizierten AV-Techniker oder eine andere Person mit geeigneter Qualifikation installiert wird. B-Tech AV Mounts, ihre Distributoren und Händler können nicht für durch fehlerhafte Montage verursachte Beschädigung oder Verletzung haftbar bzw. verantwortlich gemacht werden. Dieses Produkt muss auf einem geeigneten Untergrund montiert werden und darf nur bis zum angegebenen Höchstgewicht verwendet werden.

EN B-Tech AV Mounts recommends that this product be installed by a qualified AV technician or other suitably qualified person. B-Tech AV Mounts, its distributors and dealers are not liable or responsible for damage or injury caused by improper installation, improper use or failure to observe these safety instructions. In such cases, all guarantees will expire. This product must be mounted on a suitable surface and may only be used up to the specified maximum weight.

ES B-Tech AV Mounts recomienda que un instalador de audio y video profesional u otra persona debidamente cualificada instalen este producto. B-Tech AV Mounts, sus distribuidores y concesionarios no se hacen cargo ni se responsabilizan de ningún daño o lesión provocados por una instalación inapropiada. Este producto se debe montar en una estructura adecuada y se debe utilizar soportando solamente hasta el peso máximo indicado.

FR B-Tech AV Mounts recommande de confier l'installation de ce produit à un installateur AV professionnel ou à une autrepersonne dûment qualifiée. B-Tech AV Mounts, ses distributeurs et ses revendeurs ne sauraient être tenus responsables de tout dégât ou de toute blessure résultant d'une installation incorrecte. Ce produit doit être monté sur un support approprié et utilisé dans la limite du poids maximum indiqué.

IT B-Tech AV Mounts consiglia di affidare l'installazione di questo prodotto a un installatore specializzato o ad altra personaadeguatamente qualificata. B-Tech AV Mounts, i suoi distributori e rivenditori non accettano alcuna responsabilità nei riguardi di eventuali danni o infortuni causati da un'errata installazione. Questo prodotto deve essere fissato a una struttura idonea e utilizzato unicamente sino al peso massimo indicato.

JP B-Tech AV Mounts はAV設置の専門家または適合した知識を備えた人が製品を設置することを推奨します。 B-Tech AV Mountsと販売店、取引先はこうした安全指針に従わない場合に随伴される製品の損傷や傷害に対する責任を負いません。 場合によって製品が設置されるに適していないところもあるので設置位置に特別な注意を傾けてください。この製品の位置に注意を傾けて設置に適していない壁がいるかを確認してください。 指定した重さ制限を超過するAV装備を装着しないでください。

KR B-Tech AV Mounts 는 AV 설치 전문가 또는 적합한 지식을 갖춘 사람이 제품을 설치하도록 권장합니다. B-Tech AV Mounts 와 판매점, 거래처는 이러한 안전 지침을 따르지 않을 경우에 수반될 제품의 손상이나 상해에 대한 책임을 지지 않습니다. 경우에 따라 제품이 설치되기에 적합하지 않은 곳들도 있으므로 설치 위치에 특별한 주의를 기울여 주시기 바랍니다. 제품의 설치 위치에 주의를 기울여 확인하십시오. 지정된 무게 제한을 초과하는 AV 장비를 장착하지 마십시오.

NL B-Tech AV Mounts adviseert om dit product te laten installeren door een professionele AV-installateur of andere hiervoor gekwalificeerde persoon. B-Tech AV Mounts , haar distributeurs en dealers zijn niet aansprakelijk of verantwoordelijk voor schade of letsel die is veroorzaakt door onoordeelkundige installatie. Dit product moet worden gemonteerd aan een geschikte constructie, waarbij het aangegeven maximum gewicht niet mag worden overschreden.

PL Firma B-Tech AV Mounts zaleca, aby ten produkt był instalowany przez profesjonalnych instalatorów AV lub inny odpowiednio przeszkolony personel. Firma B-Tech AV Mounts, jej dystrybutorzy i dealerzy nie ponoszą odpowiedzialności za uszkodzenia lub obrażenia ciała powstałe w wyniku nieprawidowej instalacji. Niniejszy produkt musi być amontowany na odpowiedniej powierzchni, a podczas użytkowania nie wolno przekraczać podanego maksymalnego obciążenia.

PT A B-Tech AV Mounts recomenda que a instalação deste produto seja efectuada por um instalador de AV instalador de AV profissional ou outra pessoa devidamente habilitada. A B-Tech AV Mounts e os seus distribuidores e concessionários não são responsáveis por danos ou lesões causados por uma instalação incorrecta. Este produto tem de ser montado numa estrutura adequada e utilizado somente até ao peso máximo indicado.

RU Компания B-Tech AV Mounts рекомендует, чтобы установка данного изделия производилась инженером по установке аудтио-видеотехники или другим специалистом с соответствующей квалификацией. Компания B-Tech AV Mounts ее дистрибьюторы и дилеры не несут ответственности за повреждения или травмы, полученные в результате неправильной установки.

توصي بي- تك للتجارة الدولية المحدودة بأن شخص محترف فى تركيب ال AV او شخص مؤهل تأهيلا مناسبا لتركيب هذا المنتج. بي- تك للتجارة الدولية، موزعيها والتجار ليست عرضة أو مسؤولة عن الأضرار أو الإصابات الناجمة عن تركيب غير سليم، والاستخدام غير السليم أو عدم مراعاة هذه التعليمات للسلامة. يجب أن يتم تركيب هذا المنتج في بنية مناسبة ويجب استخدامة فقط لدعم الحد الأقصى للوزن المشار إليه.

BTech AV Mounts


BT8373 **Parts List**

Please keep this for future reference

Due to the multiple installations available the quantity for each option below is dependent on the mount ordered. All these components can be moved or carried by manpower. Please be careful to avoid injury when handling these components before & during the installation or when uninstalling the mount.

Base


BT8380-BASE

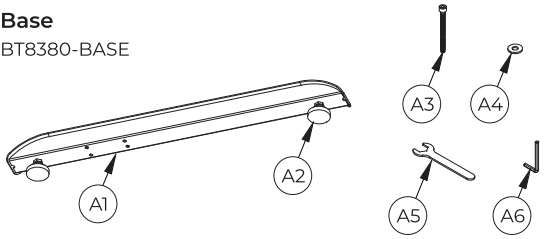

Item	Description	Qty per pack
A1	Base	1
A2	Levelling Foot	2
A3	M8 x 90mm Screw	4
A4	M8 Washer	4
A5	Spanner	1
A6	6AF Hex Key	1

Column

BT8380-060 /
BT8380-180

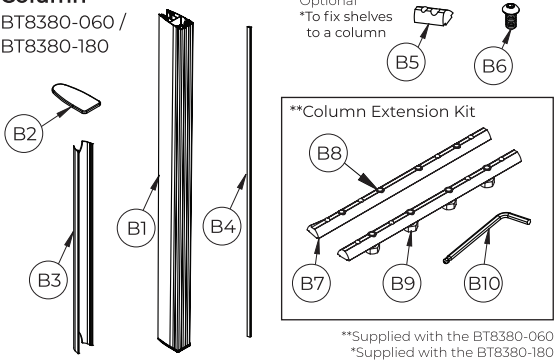


**Supplied with the BT8380-060
*Supplied with the BT8380-180

Item	Description	Qty per pack
B1	Vertical Column	1
B2	End Cap*	4
B3	Cable Cover	3
B4	Plastic Slot Insert	4
B5	M8 Sliding Nut*	2
B6	M8 x 12mm Screw*	2
B7	Column Joiner**	4
B8	Grub Screw**	16
B9	M6 X 10mm Hex Bolt**	8
B10	3AF Hex Key**	1

Joining Plate


BT8380-JPK

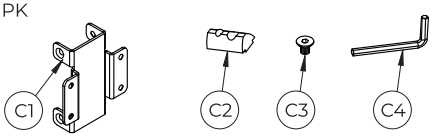

Item	Description	Qty per pack
C1	Joining Plate	1
C2	M8 Sliding Nut	8
C3	M8 x 12mm CSK Screw	8
C4	5AF Hex Key	1

Mounting Rail


BT8390-050 / BT8390-070 /
BT8390-100 / BT8390-150 /
BT8390-175 / BT8390-200

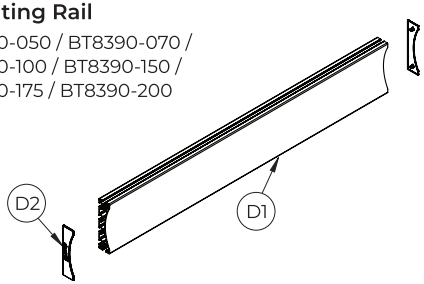

Item	Description	Qty per pack
D1	Mounting Rail	1
D2	End Cap	2

Angle Adjustment Connector

BT8390-AAC

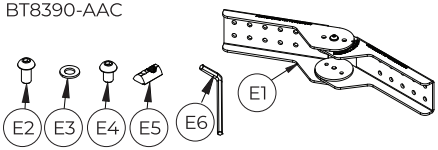


Item	Description	Qty per pack
E1	Angle Connector	1
E2	M8 x 16mm Screw	4
E3	M8 Washer	12
E4	M8 x 12mm Screw	8
E5	M8 Sliding Nut	8
E6	5AF Hex Key	1

All these components can be moved or carried by manpower. Please be careful to avoid injury when handling these components before & during the installation or when uninstalling the mount.

Interface Fixing Kit Screen Interface Arms


BT8390-VESA200F

VESA 200mm




BT8390-VESA200T

VESA 200mm




BT8390-VESA400MAF

VESA 400mm




BT8390-VESA400F

VESA 400mm




BT8390-VESA400T


VESA 400mm





BT8390-VESA400MAP

VESA 400mm










Item	Description	Qty per pack
F1	Interface Arm - Left	1
F2	Interface Arm - Right	1
F3	M6 x 8mm Screw**	2
F4	Adjustable Brace***	1
F5	M5 x 6mm Screw***	2
F6	M6 x 35mm Screw***	2
F7	3AF Hex Key***	1
F8	4AF Hex Key**	1
F9	5AF Hex Key	1
Screen Fixings		
A	M4 x 12mm Screw*	4
B	M4 x 25mm Screw*	4
C	M4 Washer*	4
D	M6 x 16mm Screw	4
E	M6 x 25mm Screw	4
F	M6 x 40mm Screw	4
G	M6 Washer	4
H	M8 x 16mm Screw	4
I	M8 x 25mm Screw	4
J	M8 x 50mm Screw	4
K	5mm Spacer	4
L	15mm Spacer	4
M	25mm Spacer	4

Screen Fixing Kit

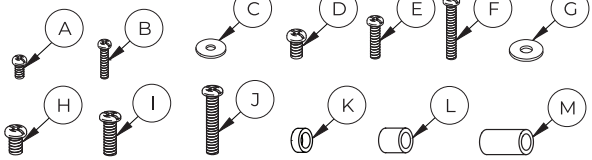

* Not included with the BT8390-VESA400F, BT8390-VESA400T, BT8390-VESA400MAF, BT8390-VESA400MAP
** Supplied with the BT8390-VESA200T & BT8390-VESA400T
*** Supplied with the BT8390-VESA400MAP

Suitable for loads up to 50kg (110lbs) per screen




Optional Component

Interface Adaptor Arm

BT7564 / BT7565

VESA 600mm / VESA 800 & 900mm

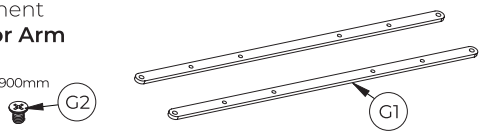


Item	Description	Qty per pack
G1	Adaptor Arms	2
G2	M8 x 12mm Screw	4

Optional Component

Accessory Mounting Arm


BT8390-SA



Item	Description	Qty per pack
H1	Hook On Arm	1
H2	Long Extension Arm	1
H3	Short Extension Arm	1
H4	Nut	4
H5	Washer	4
H6	M8 X 16mm Screw	4
H7	Spring Washer	4
H8	M8 x 20mm Screw	2

Optional Component **Shelf**


BT7863



Item	Description	Qty per pack
I1	VC Shelf	1
I2	M4 x 10mm Screw	4
I3	UNC 1/4" x 1/2" Screw	1

Typical Installations

2 x 2 Videowall Installation with VESA 400 Micro-Adjustment Arms

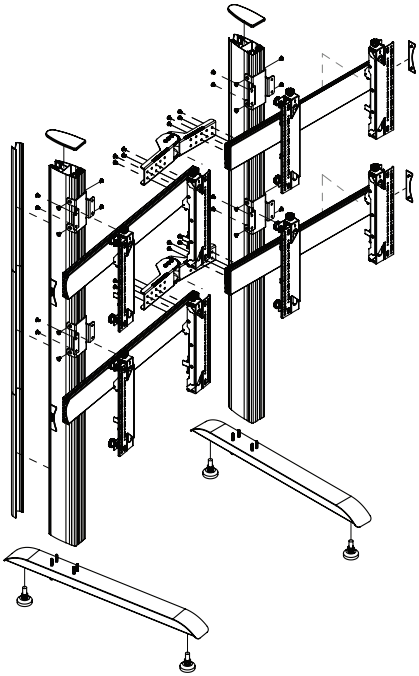

Installation Tools Required


Screwdriver



Spanner



Knife / Cutter



Level




Installation Notes


Max. Column Height 4.2m (165")

Important: Screen weight must be evenly spread up the vertical column.

Note: Larger installs may require the use of a BT8380-WTB



Column height: Up to **2.4m (95")**
Max load per screen: **50kg (110lbs)**
Max load per column: **200kg (440lbs)**




Column height: **2.4m** up to **4.2m (95"** up to **165")**
Max load per screen: **25kg (55lbs)**
Max load per column: **150kg (330lbs)**

Floorstand Stability

Warning - Danger !!!

Install stand on level ground.

Two person assembly.



When verifying the stability of the structure, consider the following external factors:


1. The strength of the floor
2. Exposure to sudden and severe wind.
3. Danger arising from contact with people and / or objects. (eg installations in passageways, emergency exits).


Optional **Extending The Columns**

Extend Vertical Columns

i. Insert *item B7* halfway into the non-threaded end of *item B1*.


Note: The two joining bars with grub screws *(item B8)* go in the front of the column and the 2 joining bars with hex bolts (*item B9)* go in the back.

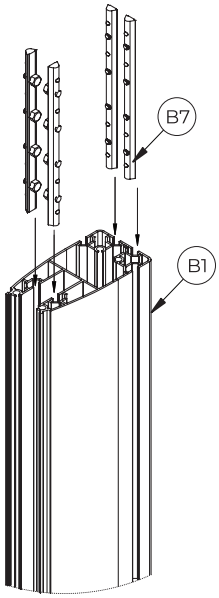

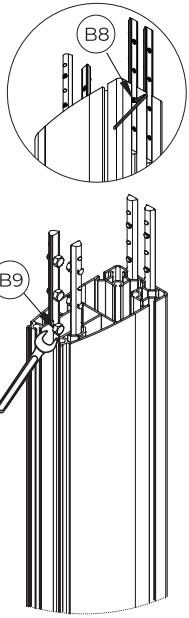


Important:

Joining bars should be inserted into the non-threaded end of the 180cm (71") column.




ii. Slide the top column *(item B1)* onto *item B7*.


Front of Column

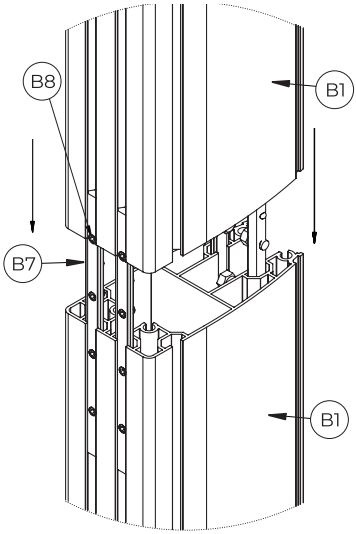

Back of Column

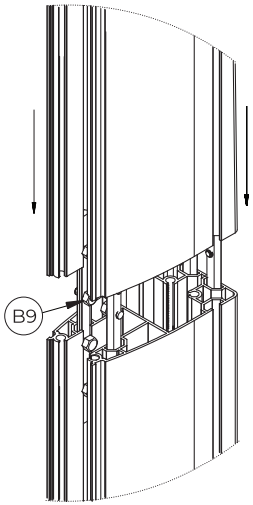

iii. Tighten hex bolts by hand. Finish tightening using a 10mm spanner.

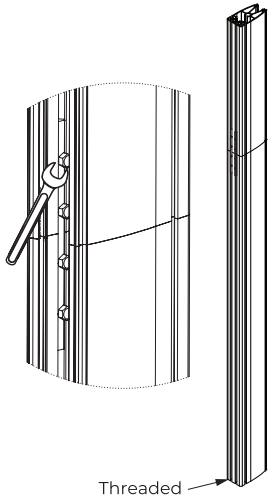


BTech AV Mounts


Installation Instructions


1. Attach Joining Plates To Columns


i. Assemble x4 *item C3* to *item C2* on *item C1*.

ii. Lay the column on the floor and fit *item C1* to *item B1*.

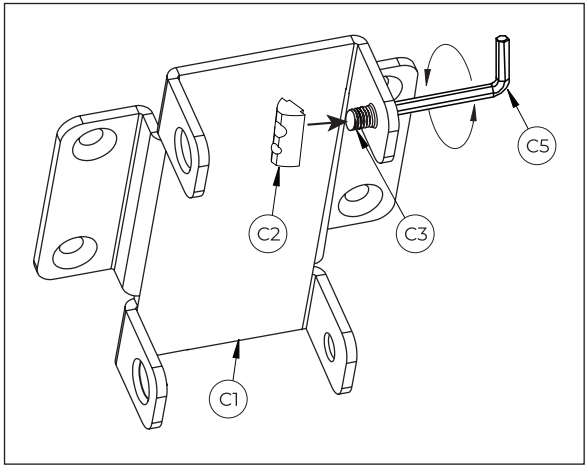

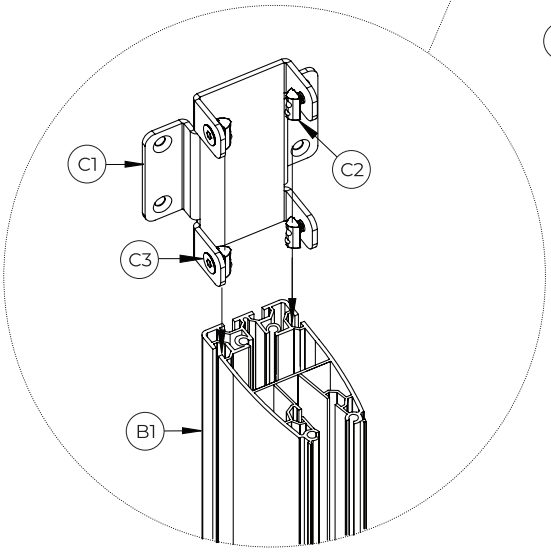


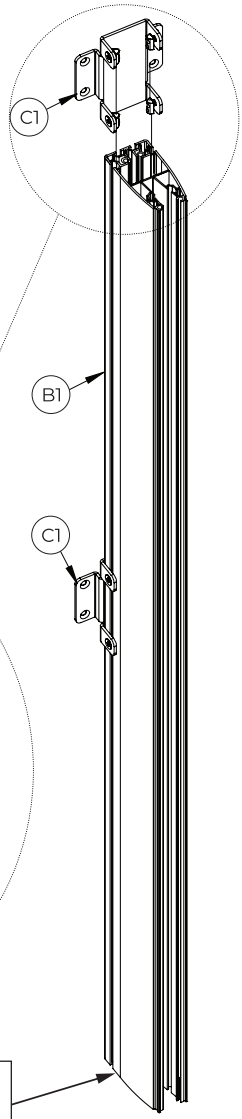




Important:
Make sure the end with M8 threads are at the bottom of the columns.

iii. Set the distance between *items C1* on *item B1* according to the screen size. Once set, tighten *item C3*.

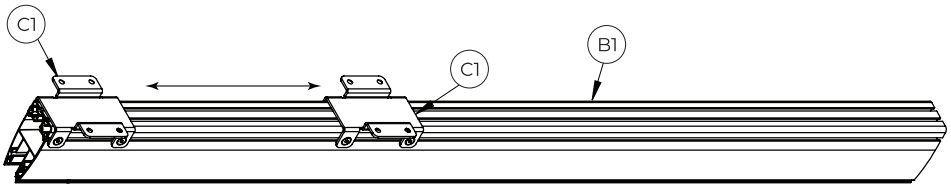


Leave at least a 5mm (0.2") gap at top of column for *item B2*.

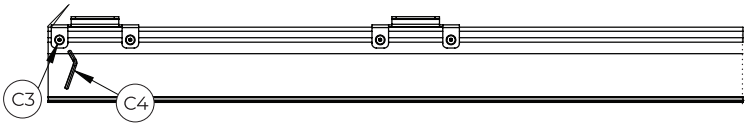

2. Insert Sliding Nuts Into Mounting Rails

i. Place the rail on the floor, and for each column *(item C1)* assembled to the rail, insert 4x *item C2* into *item D1* - Two in the 2nd channel and two in the bottom channel.

ii. To attach the Angle Connectors *(item E1)* to the rail *(item D1)* , insert x4 *item E5* into the end of *item D1* - Two in each centre channel.

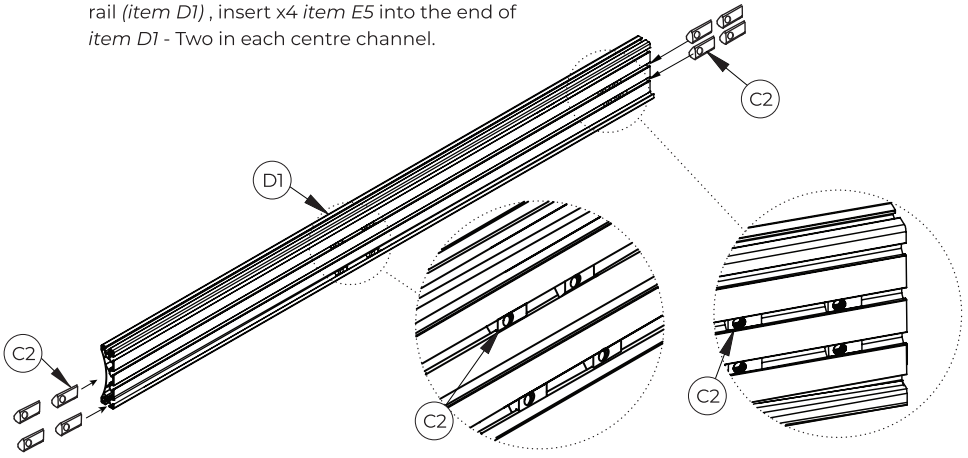

i. Column / Joining Plate Assembly

ii. Angle Adjustment Connector Assembly


BTech AV Mounts


3. Connect Rails Together Using The Angle Adjustment

i. Assemble *items E2 & E3* to *item E1*.
Do not fully tighten the screws and washers.

ii. With the rails flat on the floor, fix *item E1* to x2 *item D1* using *items E3, E4 & E5*.


Note: Make sure all rails are fixed using the same positions on *item E1**.

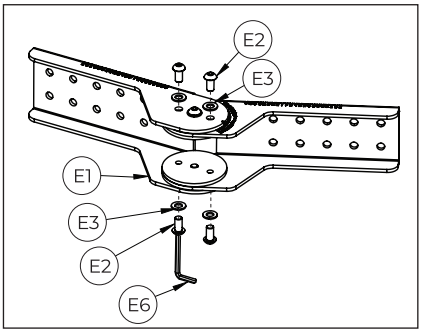

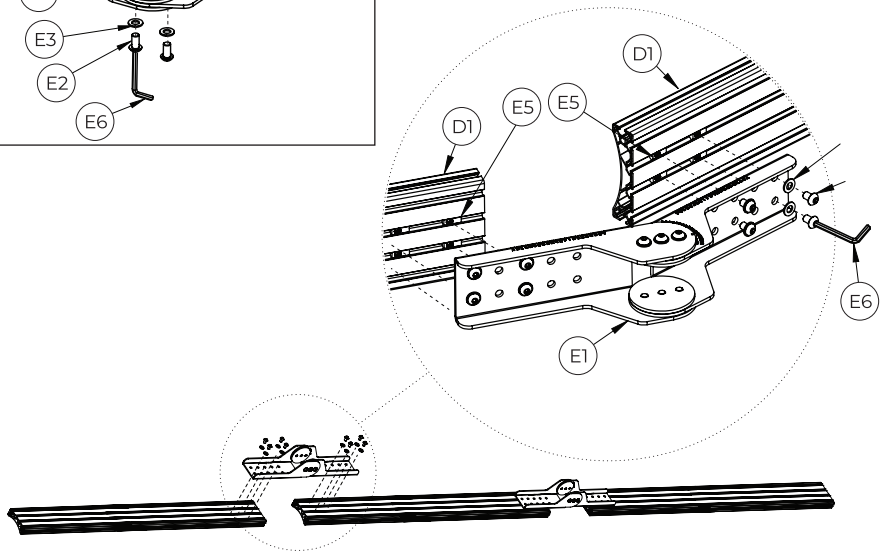

***Note:** The rail fixing positions to use on *item E1* are dependent on the size of screens being used.

For help with the rail fixing postion contact:
technical@btechavmounts.co.uk
Please state the screen size, screen depth, rail length and curve angle of the installation.

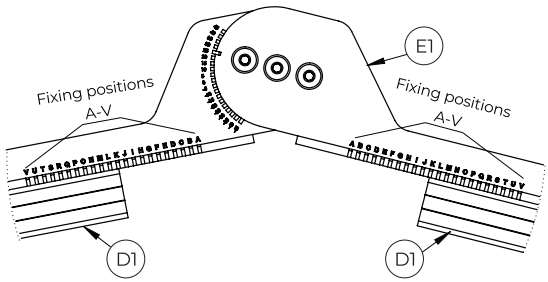


4. Attach Columns To Rails


Example installation shown: 3x2 Videowall


i. On the floor, place *item B1* onto *item D1*.


ii. Attach *item C1* to *item D1* by fastening *item C3* into the inserted *items C2*.

Note: To ensure straight assembly of *item B1* make sure the distance of *items C1* to the end *of item D1* are set the same on each rail.

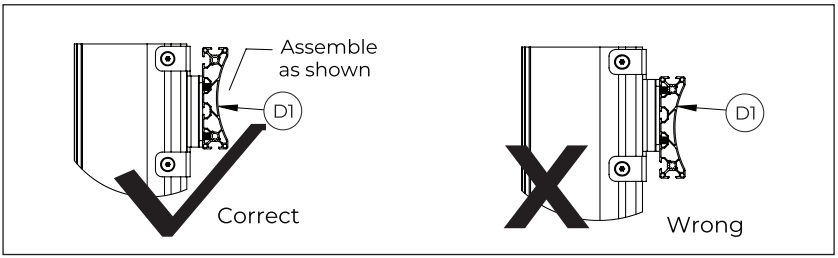

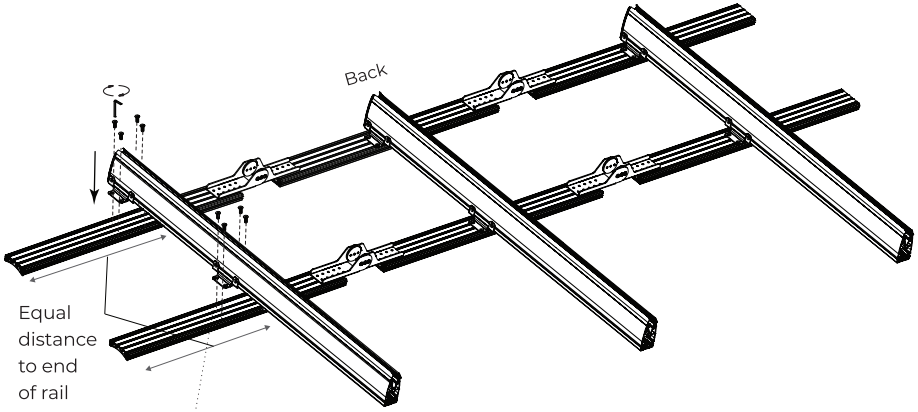

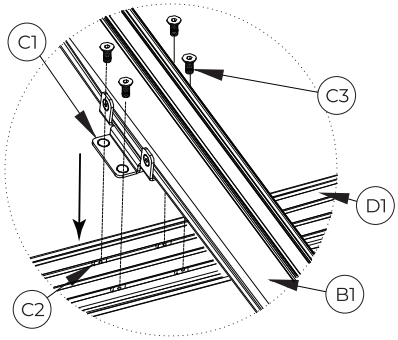

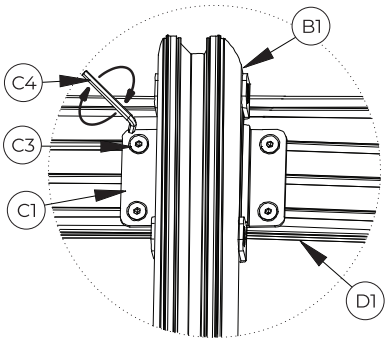



BTech AV Mounts


5. Assemble Bases To Columns

Attach *item A1* to *item B1* using *items A3 & A4*.

Note: Once bases are fixed to columns, return stand to upright position.

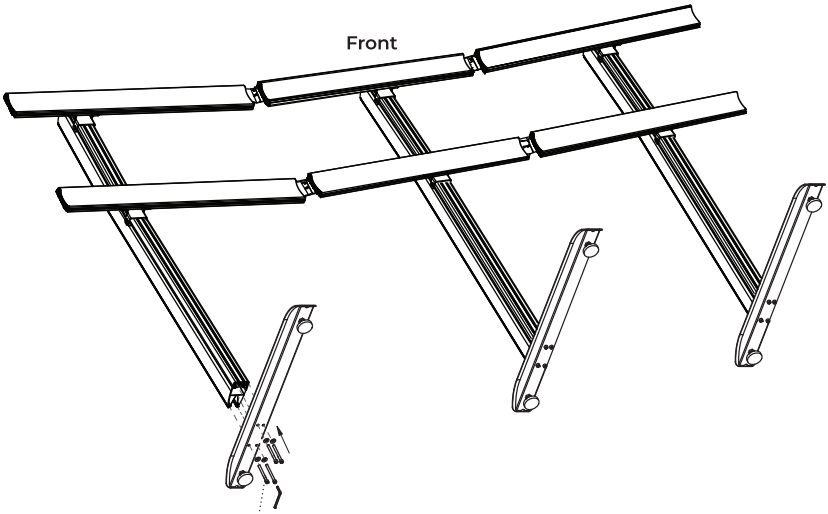


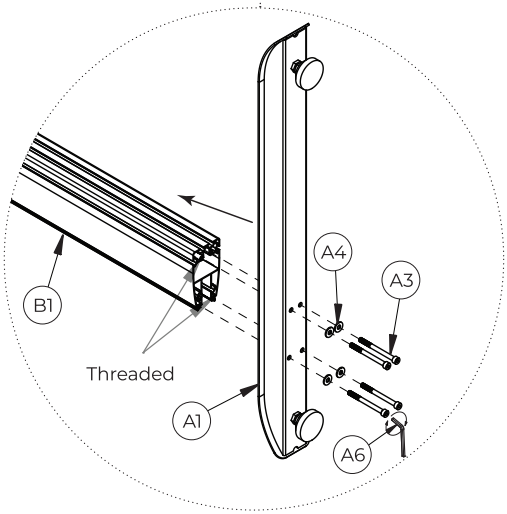


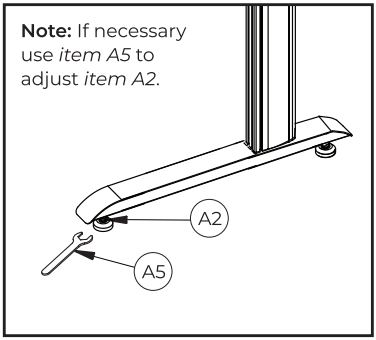

6. Fix Angle

Set the angle required on *item E1* and fully tighten all screws with *item E6.*

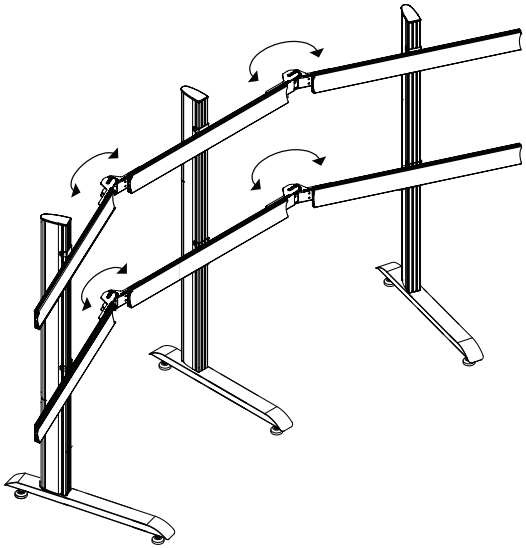


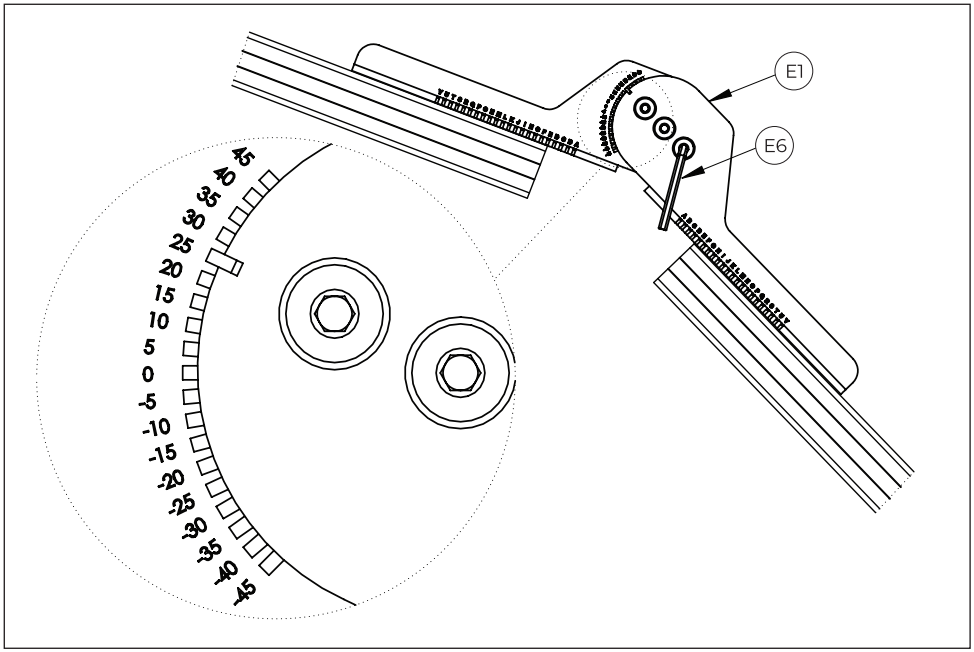


7. Attach Interface Arms To Screen

a. **Micro-Adjustment Arms**

Fix *items F1 & F2* to the rear of the screen using *items D-M*.

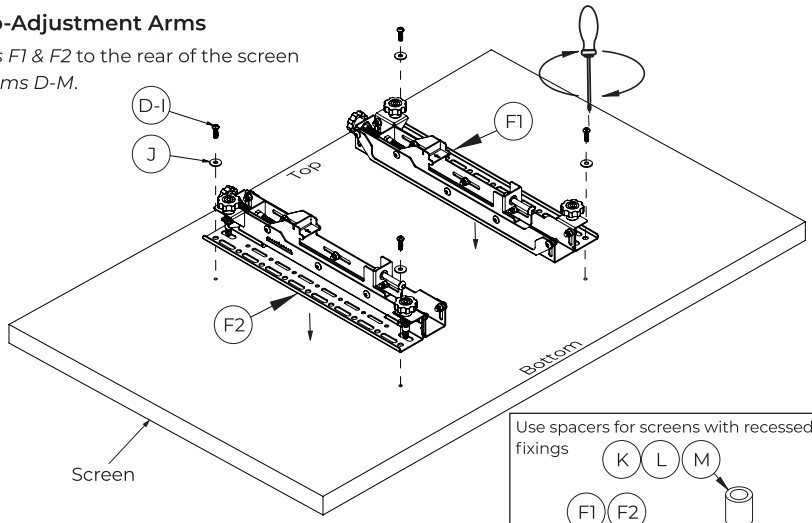



Note: Ensure the arms are facing the correct way round and the same holes are used on both arms.


Optional **Adaptor Arms**

Attach Adaptor Arms To Interface Arms

i. Use *item G2* to fix *item G1* to *items F1 & F2*.

ii. Attach *item G1* to the screen using the screen fixing kit (*items A-M*).


Assembly For Portrait Orientation

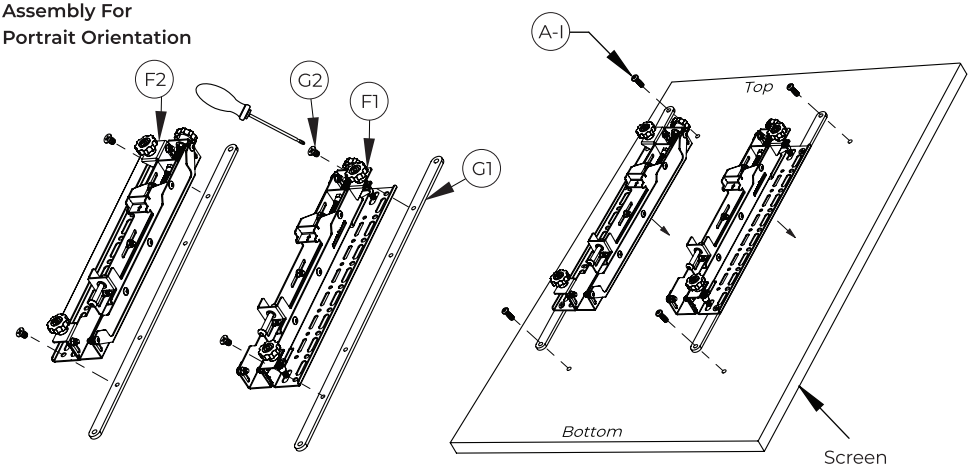

b. **Pop-Out Micro-Adjustment Arms**

i. Attach *items F1 & F2* to the back of the screen using *items D-I*.

Note: Ensure the arms are facing the correct way round and the same holes are used on both arms.

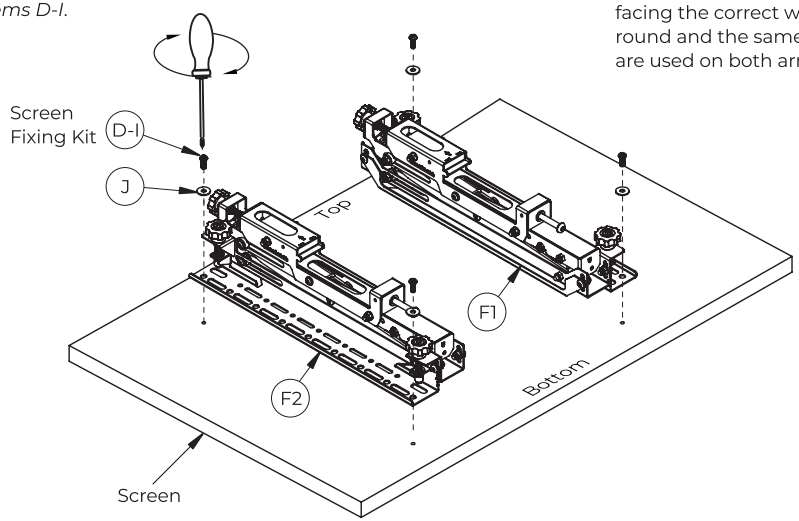



ii. Connect interface arms with the adjustable brace. Extend *item F4* and fix at desired length by tightening the 2 screws.

The 3 notches show the position for interface fixings at 400mm, 500mm and 600mm.

Note: The adjustable brace is only suitable for horizontal VESA fixings from 400 - 600mm.


iii. Fix *item F4* inbetween *items F1 & F2* for easy lateral adjustment of the screen.

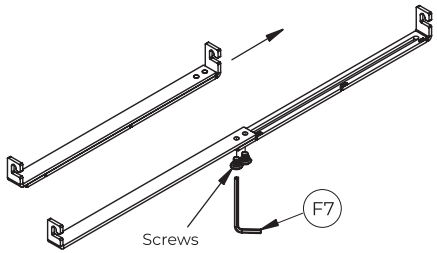


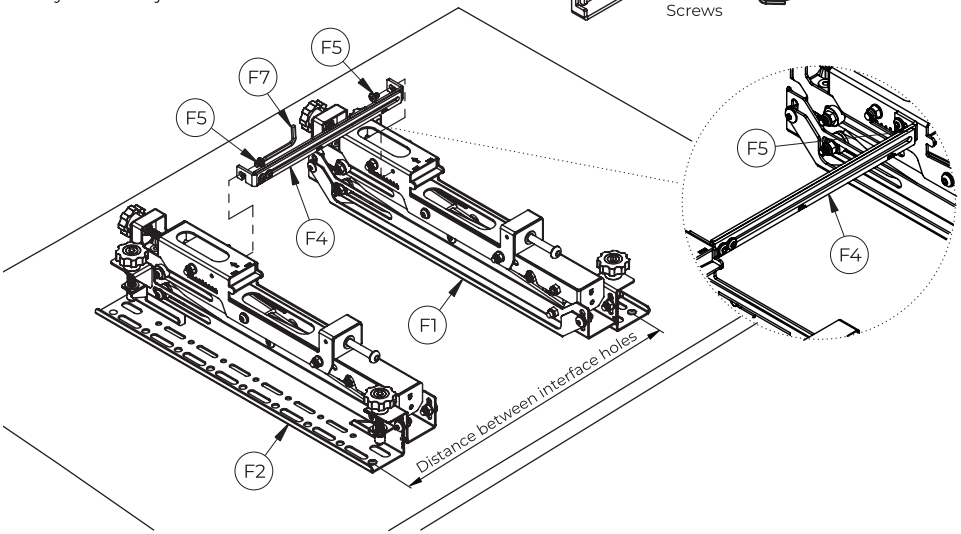

8. Mount Screen Onto Rail

i. Hook the first screen onto the bottom rail *(item D1)* on the stand.

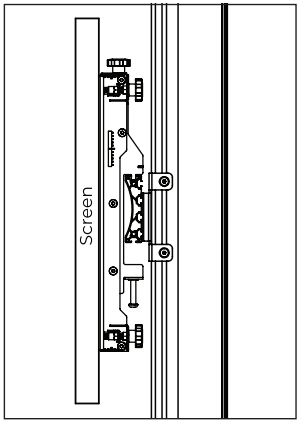

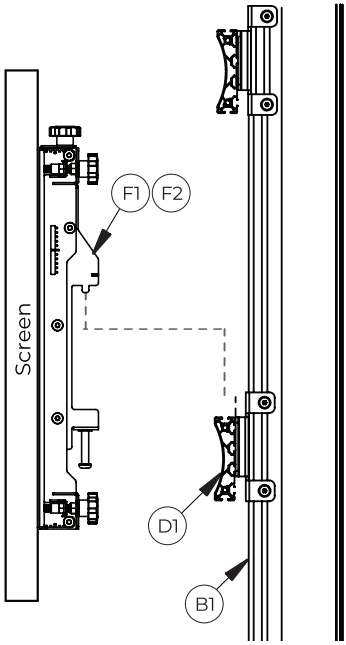


Note: If mounting 3 or more screens across, mount the first screen centrally onto the bottom rail.




ii. With a level, align the screen to the floor using the height adjustment screws / knobs on top of the interface arms.

iii. Laterally adjust screen by hand.

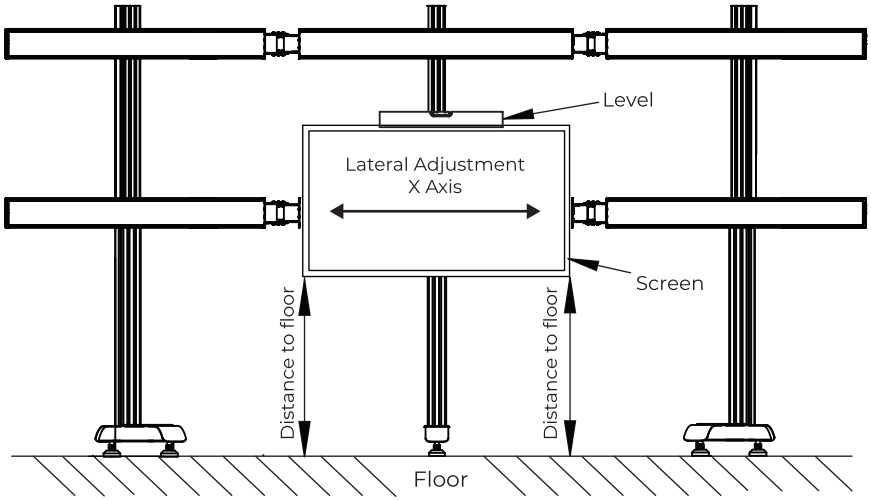

Micro-Adjustment Arms

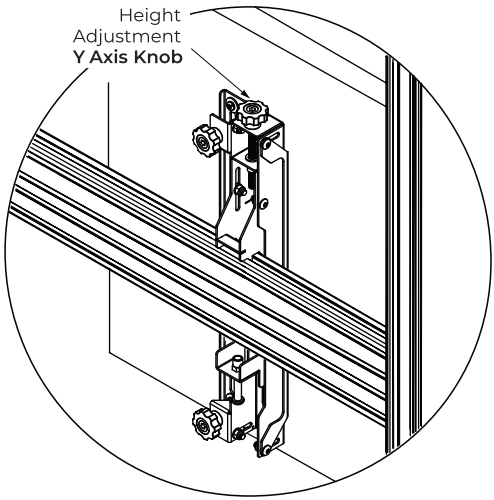


9. Hook On The Remaining Screens

Hook the remaining screens onto the stand.

Note: A 1mm gap between screens should be maintained.


After mounting each screen use the Y & Z adjustment knobs on the interface arms to level and align the screen* *(see next page).*


*Only applicable when using the BT8390-VESA400MAF or BT8390-VESA400MAP micro-adjustment interface arms.

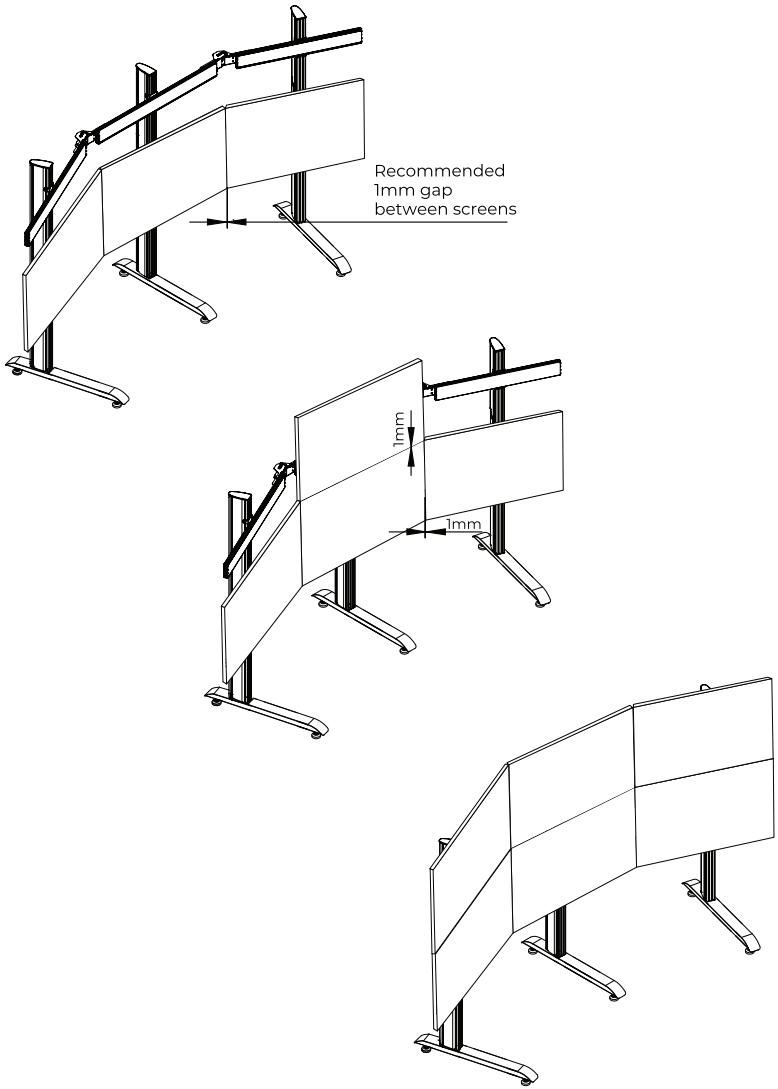


Using a level, align the screen to the floor using the Y axis adjustment knobs.


Use the Z axis knobs to ensure the screen is perpendicular with the floor.

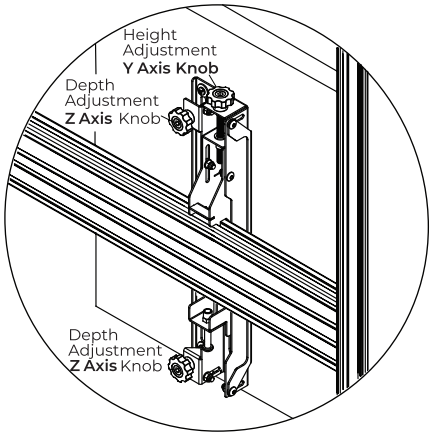

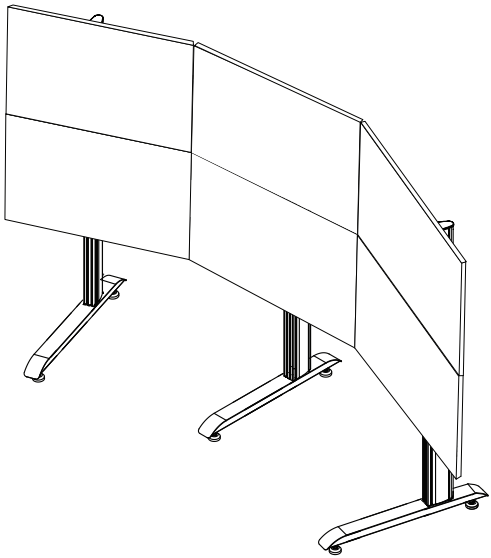





Use **Height Adjustment** (Y axis knobs) to align bottom/top of screens




Use **Lateral Adjustment** to align sides of screens



Use **Depth Adjustment** (Z axis knobs) to align front of screens





BT8390-VESA400MAF
Total Y axis adjustment is +/-25mm
Total Z axis adjustment is 20mm


Note: Light pressure in the desired direction of travel will assist in the adjustment of knobs when using heavier screens


BT8390-VESA400MAP
Total Y axis adjustment is +/-20mm
Total Z axis adjustment is 20mm


BTech AV Mounts

10. Secure Screens

Once screens are aligned, tighten the safety screws on the bottom of *items F1 & F2*.





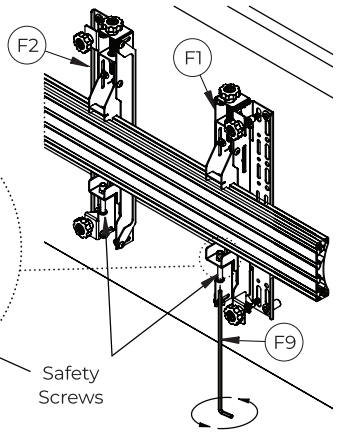


Operating Instructions

11. Servicing Screens (Pop-Out Arms Only)


Push centrally at the left and right of the screen to pop-out the mount. The screen will rest in the 'open' position for servicing.
Note: Ensure pop-out function is not disabled (see below).


Important! Be careful not to damage the screen when pushing. Keep hold of the screen as it moves outwards.

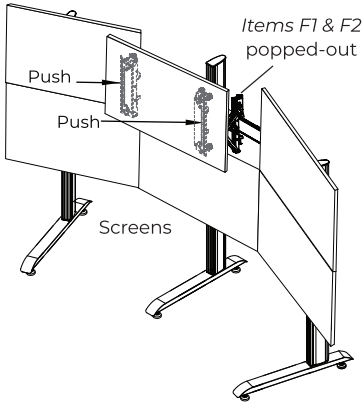


Optional **Disabling Pop-Out Function**

To prevent interface arms from popping out, fully insert and tighten *item F6* at the padlock* symbol at the bottom of *items F1 & F2*.

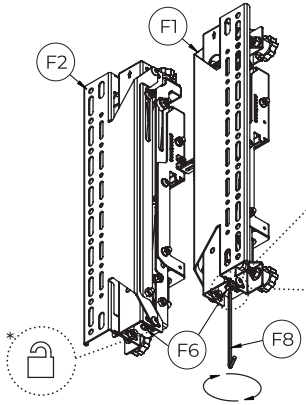





Important! Do not fully insert *item F6* when interface arms are popped out.


12. Add End Caps And Covers


i. After screen cables are connected and routed down the back of *item B1*, partially clip on the cable management covers (*item B3)*, this allows easy removal if more cables need adding. Once satisfied all cables are fitted, clip *item B3* on fully.


ii. Fit *item B2* to the top of *item B1*.

iii. Fit *item D2* to the ends of *item D1*.

iv. With a knife, cut to length *item B4* and insert to the front and sides of *item B1*.

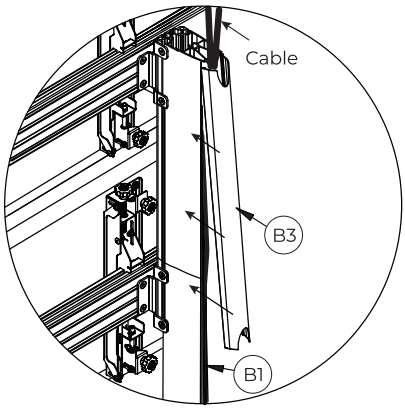

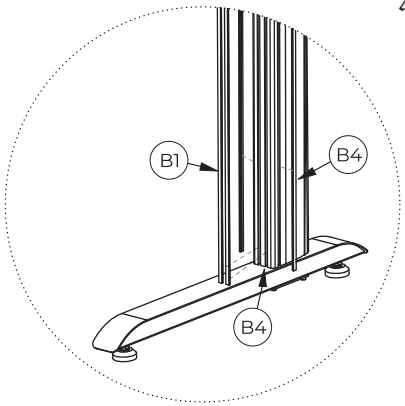

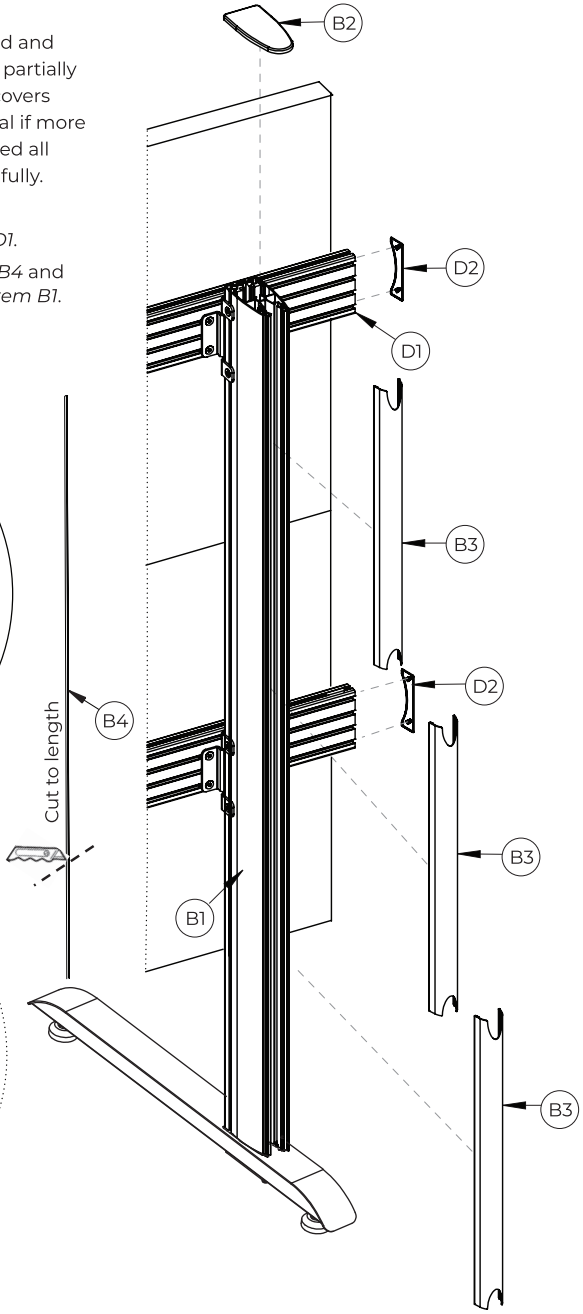


Warning! Contact a professional AV installer or other suitably qualified person for any further operation or removal of equipment after installation

Optional **Component Accessories**

Installing A Camera Shelf

i. Attach *item H2* to *item H1* using *items H4 & H5*.
ii. Attach *item I1* to *item H2* using *items H6 & H7*.


Assembly shown for mounting the shelf below the rail / screens.

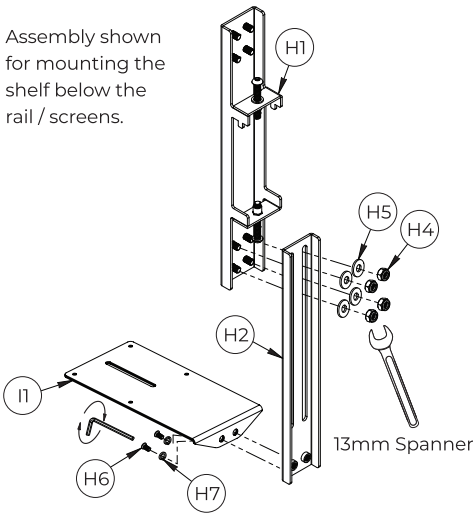


Note: Assemble accessory arm onto the mounting rail before mounting screens to rail.

Optional **Add Extension Bar**


i. For an extended reach attach *item H3* onto *item H2*.
ii. Attach *item I1* to *item H3* using *items H6 & H7*.

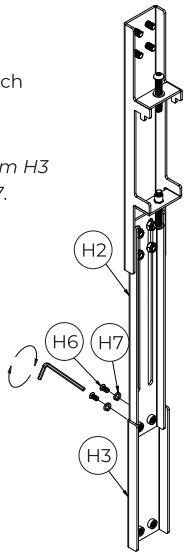

iii. Hook *item H1* onto *item B*1.

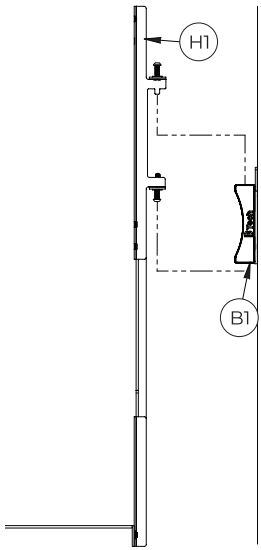

iv. Secure shelf to rail.
Optional: Level the shelf bracket by using height adjustment screw on *item H1*.
Use the safety screw underneath *item H1* to secure the mounting arm to *item D1*.

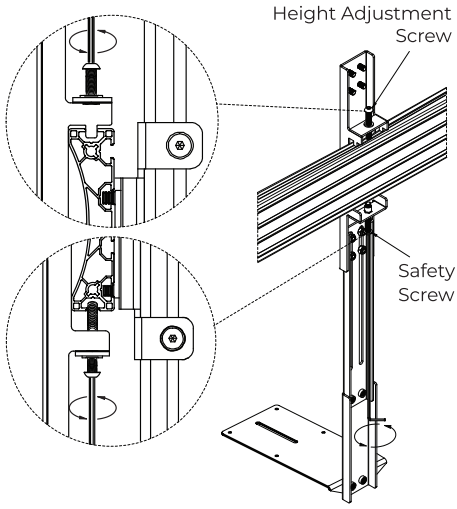

v. Use *items I2 & I3* to fix a camera to *item I1*.


BT8373 **Dimensions**

Please keep this for future reference


Depending on installation requirements, the BT8373 Videowall Stand will feature a selection of the following products.

Base

BT8380-BASE

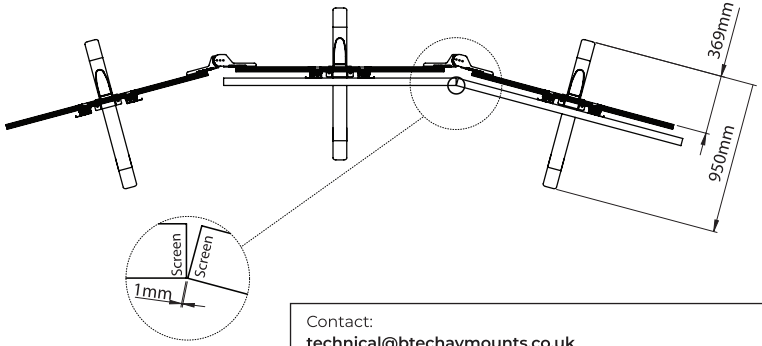


Contact:
technical@btechavmounts.co.uk
for complete technical drawings based on your specific installation.

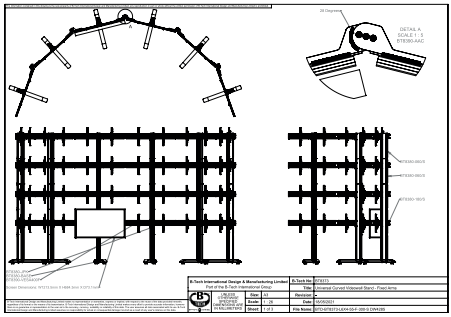


Angle Adaptor

BT8380-AAC




Interface Arms

BT8390-VESA400MAF
Fixed VESA 400mm Interface Arms
with Micro-Adjustment

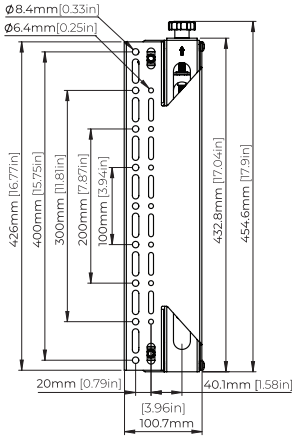

BT8390-VESA400MAP
Pop-Out VESA 400mm Interface Arms
with Micro-Adjustment

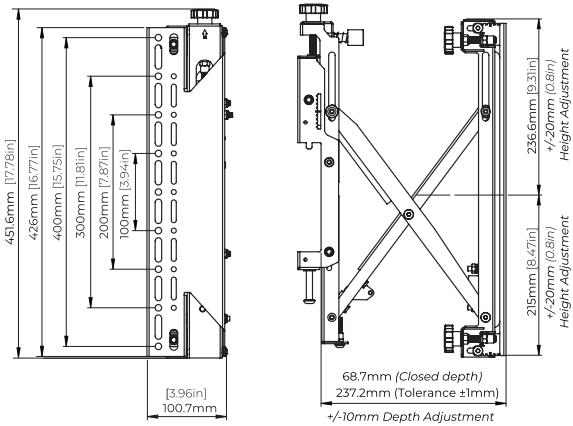

These instructions are intended as a guide only and B-Tech accepts no liability for the accuracy of the information contained in this document.

BTech AV Mounts

Contact: info@btechavmounts.com

©2026 B-Tech AV Mounts Corporation Ltd. All rights reserved.

B-Tech AV Mounts is a division of B-Tech AV Mounts Corporation Ltd.
B-Tech AV Mounts and the B-Tech logo are registered trademarks.
All B-Tech images and symbols are exclusive property of B-Tech AV Mounts Corporation Ltd.
All other brands and product names are trademarks of their respective owners.
Any reproduction, retransmission or republication of any part of this manual is strictly prohibited, unless prior written permission has been granted by B-Tech AV Mounts Corporation Ltd.
Photographs are for illustrative purposes only. E&OE

AMA-BT8373-V3.1-0826-BTECH Made in the P.R.C.