


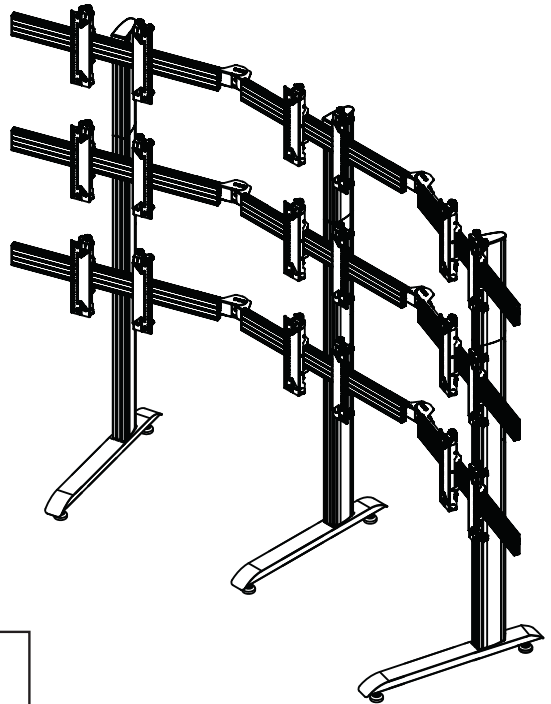

B-TECH AV MOUNTS

SYSTEM X™

BT8373UNIVERSAL CURVED
VIDEOWALL STAND**INSTALLATION GUIDE****SPECIFICATIONS**

- Recommended screen size: 39" - 70"
- Max weight per screen: 50kg (110lbs)
- Suitable for landscape or portrait mounting
- Angle adjustment range: +/- 45° between screens
- Safety screws help prevent unauthorised removal of screens
- All mounting hardware included

Note: This assembly manual covers different installations. Some parts or procedures shown may not be required for installation.

Please refer to page 5
for VESA® fixings



PER SCREEN

CONTENTS

Installation Safety Notes.....	2
Parts List.....	4
Typical Installation.....	6
Installation Notes.....	6
Installation Instructions.....	8
Product Dimensions.....	23
B-Tech Contact Details.....	24

INSTALLATION & OPERATING SAFETY INSTRUCTIONS



CAUTION: This mount is intended for use only with the maximum weights indicated. Use with equipment heavier than the maximum indicated may result in instability causing possible injury.

Do not attempt to install this product until all instructions and warnings have been read and properly understood.
Please keep these instructions for future reference.

Please check carefully to make sure there are no missing or defective parts - defective parts must never be used. B-Tech AV Mounts, its distributors and dealers are not liable or responsible for damage or injury caused by improper installation, improper use or failure to observe these safety instructions. In such cases, all guarantees will expire. Check with the place of purchase for information on any guarantees, repairs or replacements of this product.

General

B-Tech AV Mounts recommends that a professional AV installer or other suitably qualified person install this product. Great care must always be taken during installation as most AV equipment is of a fragile nature, possibly heavy and easily damaged if dropped.

If you do not fully understand the instructions or are not sure how to install this product safely, then please consult a professional for advice and/or to install this product for you. Failure to mount this product correctly may cause serious injury or death, both during installation and at any time thereafter.

Do not mount any AV equipment that exceeds the specific weight limit of the product you are installing.

This weight limit will be clearly stated on each product and its packaging and will vary from product to product.

Product location

Please pay careful attention to where this product is located. Designed for indoor use, this stand is suitable for public or home installation. Check load capacity of the floor prior to installation to ensure that it can support the combined weight of the equipment and hardware, some surfaces are not suitable for installation.

When verifying the stability of the structure, consider the following external factors: The strength of the floor, exposure to sudden and severe wind and danger arising from contact with people and / or objects (eg installations in passageways, emergency exits), if located in a public or frequently populated area ensure that the product is out of the immediate reach of people. When drilling holes it is essential to avoid contact with electrical cables and water or gas pipes contained within.

Use of a good quality live wire detector and hidden object locator is therefore recommended. Only drill into structures when you are sure it is safe to do so.

Fixing hardware

It is highly recommended that all fixing screws be used where supplied and that the purpose of all other fixing hardware is fully understood. In some cases more AV equipment fixing hardware will be supplied to accommodate different models of equipment and set up configurations. The installer must be satisfied that any supplied fixing hardware is suitable for each specific installation.

If any fixing screws or included hardware are deemed not sufficient for a safe installation then please consult a professional or your local hardware store.

Hazard limitation

When routing cables take advantage of any built in cable management features that the product might provide and ensure that all cables are tidy and secure. Check to see that any moving aspect of the product can do so unhindered by any cabling. Some products have moving parts and the potential to cause injury through the crushing or trapping of fingers or other body parts. Particular attention to the nature of moving parts is required especially when assembling installing and adjusting during set up. Immediately after installation double-check that the work done is safe and secure. Double-check all necessary fixings are present and are of ample tightness.

Operating & Maintenance

It is recommended that periodic inspections of the product and its fixing points are made as frequently as possible (no more than 6 months apart) to ensure that safety is maintained. B-Tech AV Mounts recommends that a suitably qualified person is used for the removal of this product. Please dispose of the product and packaging carefully and with consideration to the environment. If in doubt consult a professional AV installer or other suitably qualified person.

- CN B-Tech AV Mounts 建议本产品由专业AV安装人员或其他合格人员安装。B-Tech AV Mounts 及它的代理商、经销商不对由于不恰当的安装而造成的损失或伤害负责。本产品必须安装在合适的架构上，并仅用于不超过所标示的最大承重。
- CS Společnost B-Tech AV Mounts doporučuje provést instalaci tohoto produktu instalátora AV či jinak způsobilé osoby. Společnost B-Tech AV Mounts, její distributoři a prodejci nenesou prostřednictvím odborného odpov. édnost za škody nebo zranění zp. úšobená nevhodnou instalací. Tento výrobek je nutno umístit do vhodné konstrukce a používat jen po uvedené maximální výšce.
- DE B-Tech AV Mounts empfiehlt, dass dieses Produkt durch einen qualifizierten AV-Techniker oder eine andere Person mit geeigneter Qualifikation installiert wird. B-Tech AV Mounts, ihre Distributoren und Händler können nicht für durch fehlerhafte Montage verursachte Beschädigung oder Verletzung haftbar bzw. verantwortlich gemacht werden. Dieses Produkt muss auf eine geeigneten Untergrund montiert werden und darf nur bis zum angegebenen Höchstgewicht verwendet werden.
- EN B-Tech AV Mounts recommends that a professional audio video installer or other suitably qualified person install this product. B-Tech AV Mounts, its distributors and dealers are not responsible for or responsible for any damage or injury caused by improper installation. This product must be mounted on a suitable structure and it should only be used supporting the maximum weight indicated.
- ES B-Tech AV Mounts recomienda que un instalador de audio y video profesional u otra persona debidamente cualificada instale este producto. B-Tech AV Mounts, sus distribuidores y concesionarios no se hacen cargo ni se responsabilizan de ningún daño o lesión provocados por una instalación inapropiada. Este producto se debe montar en una estructura adecuada y se debe utilizar soportando solamente hasta el peso máximo indicado.
- FR B-Tech AV Mounts recommande de confier l'installation de ce produit à un installateur AV professionnel ou à une autre personne dûment qualifiée. B-Tech AV Mounts, ses distributeurs et ses revendeurs ne sauraient être tenus responsables de tout dégât ou de toute blessure résultant d'une installation incorrecte. Ce produit doit être monté sur un support approprié et utilisé dans la limite du poids maximum indiqué.
- IT B-Tech AV Mounts consiglia di affidare l'installazione di questo prodotto a un installatore specializzato o ad altra persona adeguatamente qualificata. B-Tech AV Mounts, i suoi distributori e rivenditori non accettano alcuna responsabilità nei riguardi di eventuali danni o infortuni causati da un'errata installazione. Questo prodotto deve essere fissato a una struttura idonea e utilizzato unicamente sino al peso massimo indicato.
- JP B-Tech AV Mounts はAV設置の専門家または適合した知識を備えた人が製品を設置することを推奨します。B-Tech AV Mounts と販売店、取引先はこうした安全指針に従わない場合に随伴される製品の損傷や傷害に対する責任を負いません。場合によって製品が設置されるに適していないところもあるので設置位置に特別な注意を傾けてください。この製品の位置に注意を傾けて設置に適していない壁があることを確認してください。指定した重さ制限を超過するAV装備を装着しないでください。
- KR B-Tech AV Mounts 는 AV 설치 전문가 또는 적합한 지식을 갖춘 사람이 제품을 설치하도록 권장합니다. B-Tech AV Mounts 와 판매점, 거래처는 이러한 안전 지침을 따르지 않을 경우에 수반될 제품의 손상이나 상해에 대한 책임을 지지 않습니다. 경우에 따라 제품이 설치되기에 적합하지 않은 곳들도 있으므로 설치 위치에 특별한 주의를 기울여 주시기 바랍니다. 제품의 설치 위치에 주의를 기울여 확인하십시오. 지정된 무게 제한을 초과하는 AV 장비를 장착하지 마십시오.
- NL B-Tech AV Mounts adviseert om dit product te laten installeren door een professionele AV-instalateur of andere hiervoor gekwalificeerde persoon. B-Tech AV Mounts, haar distributeurs en dealers zijn niet aansprakelijk of verantwoordelijk voor schade of letsel die is veroorzaakt door onoordeelkundige installatie. Dit product moet worden gemonteerd aan een geschikte constructie, waarbij het aangegeven maximum gewicht niet mag worden overschreden.
- PL Firma B-Tech AV Mounts zaleca, aby ten produkt był instalowany przez profesjonalnych instalatorów AV lub inny odpowiednio przeszkolony personel. Firma B-Tech AV Mounts, jej dystrybutorzy i dealerzy nie ponoszą odpowiedzialności za uszkodzenia lub obrażenia ciała powstałe w wyniku nieprawidłowej instalacji. Niniejszy produkt musi być amontowany na odpowiedniej powierzchni, a podczas użytkowania nie wolno przekraczać podanego maksymalnego obciążenia.
- PT A B-Tech AV Mounts recomenda que a instalação deste produto seja efectuada por um instalador de AV instalador de AV profissional ou outra pessoa devidamente habilitada. A B-Tech AV Mounts e os seus distribuidores e concessionários não são responsáveis por danos ou lesões causados por uma instalação incorrecta. Este produto tem de ser montado numa estrutura adequada e utilizado somente até ao peso máximo indicado.
- RU Компания B-Tech AV Mounts рекомендует, чтобы установка данного изделия производилась инженером по установке аудио-видеотехники или другим специалистом с соответствующей квалификацией. Компания B-Tech AV Mounts ее дистрибьюторы и дилеры не несут ответственности за повреждения или травмы, полученные в результате неправильной установки.

توصي بي-تك للتجارة الدولية المحدودة بأن شخص محترف في تركيب ال AV أو شخص مؤهل تأهيلا مناسباً لتركيبة هذا المنتج. بي-تك للتجارة الدولية، موزعها والتجار ليست عرضة أو مسؤولة عن الأضرار أو الإصابات الناجمة عن تركيب غير سليم، والاستخدام غير السليم أو عدم مراعاة هذه التعليمات للسلامة. يجب أن يتم تركيب هذا المنتج في بنية مناسبة ويجب استخدام فقط لدعم الحد الأقصى للوزن المشار إليه.

BT8373 PARTS LIST



PLEASE KEEP THIS FOR FUTURE REFERENCE

Due to the multiple installations available the quantity for each option below is dependent on the mount ordered. All these components can be moved or carried by manpower. Please be careful to avoid injury when handling these components before & during the installation or when uninstalling the mount.

(A) BASE

BT8380-BASE

ITEM	PART NAME	QTY
A1	BASE	1
A2	LEVELLING FOOT	2
A3	M8 x 90mm SCREW	4
A4	M8 WASHER	4
A5	SPANNER	1
A6	6AF HEX KEY	1

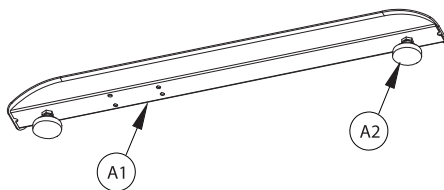

(B) COLUMN


BT8380-180
Height: 180cm

BT8380-060
Height: 60cm


ITEM	PART NAME	QTY
B1	VERTICAL COLUMN	1
B2	END CAP*	1
B3	CABLE COVER	3
B4	PLASTIC SLOT INSERT	4
B5	M8 SLIDING NUT*	2
B6	M8 x 12mm SCREW*	2
B7	COLUMN JOINER**	4
B8	GRUB SCREW**	16
B9	M6 x 10mm HEX BOLT**	8
B10	3AF HEX KEY**	1

*Supplied with the BT8380-180


**Supplied with the BT8380-060

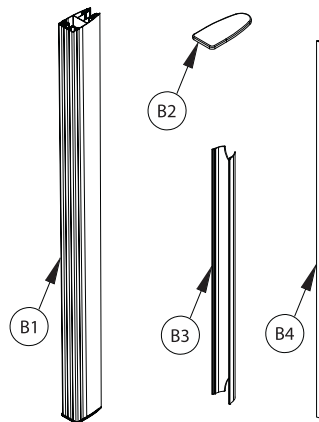

Optional
*To fix shelves
to a column





**Column Extension Kit



(C) JOINING PLATE

BT8380-JPK

ITEM	PART NAME	QTY
C1	JOINING PLATE	1
C2	M8 SLIDING NUT	8
C3	M8 x 12mm SCREW	4
C4	5AF HEX KEY	1



(D) MOUNTING RAIL

BT8390-050
Length: 50cm

BT8390-070
Length: 70cm

BT8390-100
Length: 100cm


BT8390-150
Length: 150cm

BT8390-175
Length: 175cm

BT8390-200
Length: 200cm

BT8390-300
Length: 300cm


ITEM	PART NAME	QTY
D1	MOUNTING RAIL	1
D2	END CAP	2



(E) ANGLE ADJUSTMENT CONNECTOR

BT8390-AAC

ITEM	PART NAME	QTY
E1	ANGLE CONNECTOR	1
E2	M8 x 16mm SCREW	4
E3	M8 WASHER	12
E4	M8 x 12mm SCREW	8
E5	M8 SLIDING NUT	8
E6	5AF HEX KEY	1



(F) SPACER

BT8390-SP




ITEM	PART NAME	QTY
F1	SPACER	1

G SCREEN INTERFACE KIT

ITEM	PART NAME	QTY
G1	INTERFACE ARM - RIGHT	1
G2	INTERFACE ARM - LEFT	1
G3	M6 x 8mm HEX SCREW	2
G4	ADJUSTABLE BRACE	1
G5	M5 x 6mm SCREW	2
G6	M6 x 35mm SCREW	2
G7	3AF HEX KEY	1
G8	4AF HEX KEY	1
G9	5AF LONG HEX KEY	1
ITEM	SCREEN FIXING KIT	QTY
A	M4 x 12mm SCREW	4
B	M4 x 25mm SCREW	4
C	M4 x 40mm SCREW	4
D	M6 x 16mm SCREW	4
E	M6 x 25mm SCREW	4
F	M6 x 40mm SCREW	4
G	M8 x 16mm SCREW	4
H	M8 x 25mm SCREW	4
I	M8 x 40mm SCREW	4
J	MULTIWASHER	4
K	5mm SPACER	4
L	13mm SPACER	4
M	24mm SPACER	4
N	M6 WASHER	4

H OPTIONAL INTERFACE ADAPTOR ARMS

BT7564	BT7565	BT7566
VESA	VESA	VESA
600mm	800mm	900mm




ITEM	PART NAME	QTY PER PACK
H1	ADAPTOR ARMS	2
H2	M8 x 12mm SCREW	4

Interface Arms

Fixed	Tilt	Micro-Adjustment
BT8390-VESA200F 	BT8390-VESA200T 	BT8390-VESA400MAF
BT8390-VESA400F 	BT8390-VESA400T 	BT8390-VESA400MAP
Max load: 50kg (110lbs) Per Screen		

Screen Fixing Kit

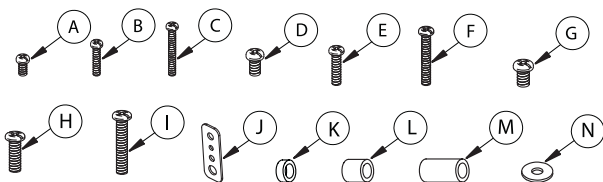


OPTIONAL COMPONENTS

I OPTIONAL ADJUSTABLE MOUNTING ARM

BT8390-SA


ITEM	PART NAME	QTY PER PACK
I1	HOOK ON ARM	1
I2	LONG EXTENSION ARM	1
I3	SHORT EXTENSION ARM	1
I4	NUT	4
I5	WASHER	4
I6	M8 x 16mm SCREW	4
I7	SPRING WASHER	4
I8	M8 x 20mm SCREW	2

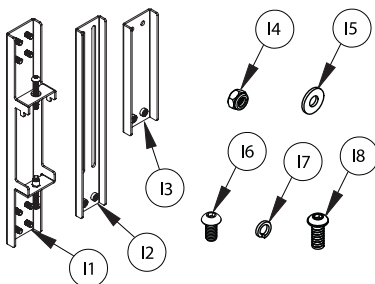

J OPTIONAL SHELF


BT7863

ITEM	PART NAME	QTY PER PACK
J1	VC SHELF	1
J2	M4 x 10mm SCREW	4
J3	UNC 1/4" x 1/2" SCREW	1



TYPICAL INSTALLATION

2 x 2 Videowall installation with
VESA 400 Micro-Adjustment arms

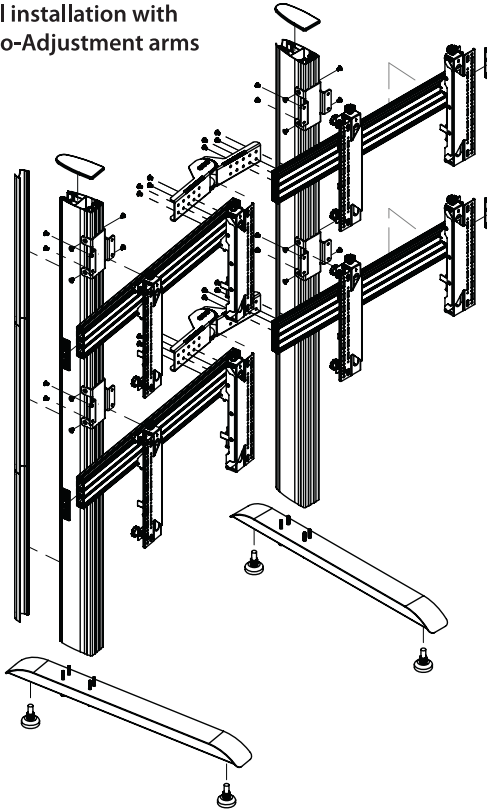

INSTALLATION TOOLS REQUIRED

Crosshead
screwdriver



Spanner



Knife/Cutter



Level (Optional)




BT8373 MAX LOAD CONFIGURATIONS

MAX. COLUMN HEIGHT 4.2M


Important: Screen weight must be evenly spread up the vertical column

NOTE: Larger installs may require the
use of a BT8380-WTB



Column height: Up to 2.4m
Max load per screen: 50kg
Max load per vertical
column: 200kg

Column height:
2.4m up to 4.2m
Max load per
screen: 25kg
Max load per vertical
column: 150kg

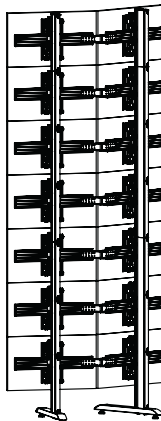


INSTALLATION NOTES

FLOORSTAND STABILITY

WARNING !!!

- 2 person assembly
- Install stand on
level ground



When verifying the stability of the structure,
consider the following external factors:

1. The strength of the floor.
2. Exposure to sudden and severe wind.
3. Danger arising from contact with people
and / or objects. (eg installations in
passageways, emergency exits).



OPTIONAL EXTENDING THE COLUMNS

EXTEND VERTICAL COLUMNS

i. Insert *item B7* halfway into the non-threaded end of *item B1*.


The two joining bars with *item B8* go in the front of the column and the 2 joining bars with *item B9* go in the back.

IMPORTANT: Joining bars should be inserted into the non-threaded end of the 180cm column.

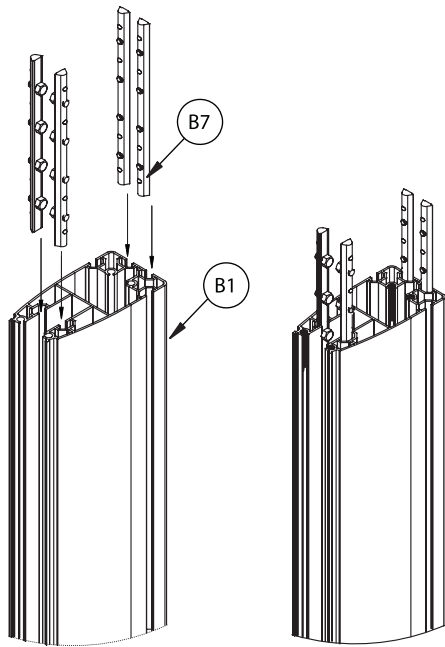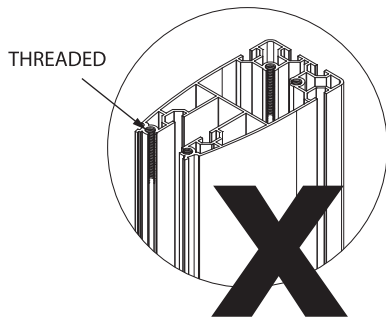


Front of Column

ii. The two joining bars with grub screws (*item B8*) in the front of the column.

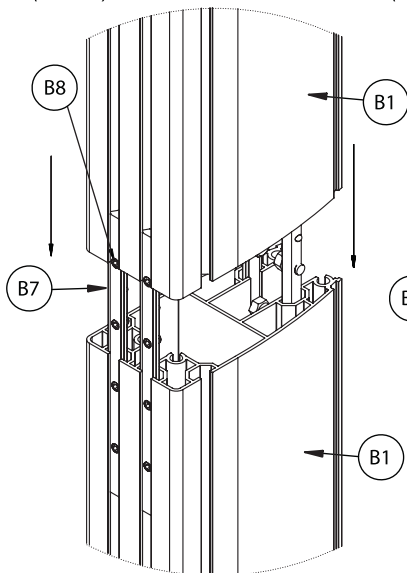


Back of Column

The two joining bars with hex bolts (*item B9*) in the rear of the column.

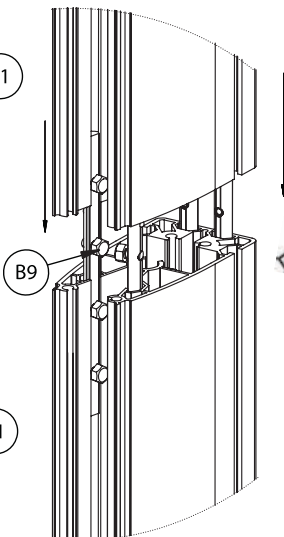




Tighten hex bolts by hand. Finish tightening using a 10mm spanner.

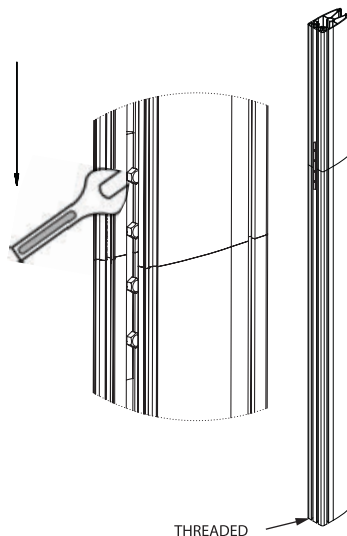

INSTALLATION INSTRUCTIONS


1. ATTACH JOINING PLATES TO COLUMNS

- On item C1, assemble 4x item C3 to item C2.
- Lay the column on the floor and fit item C1 to item B1.

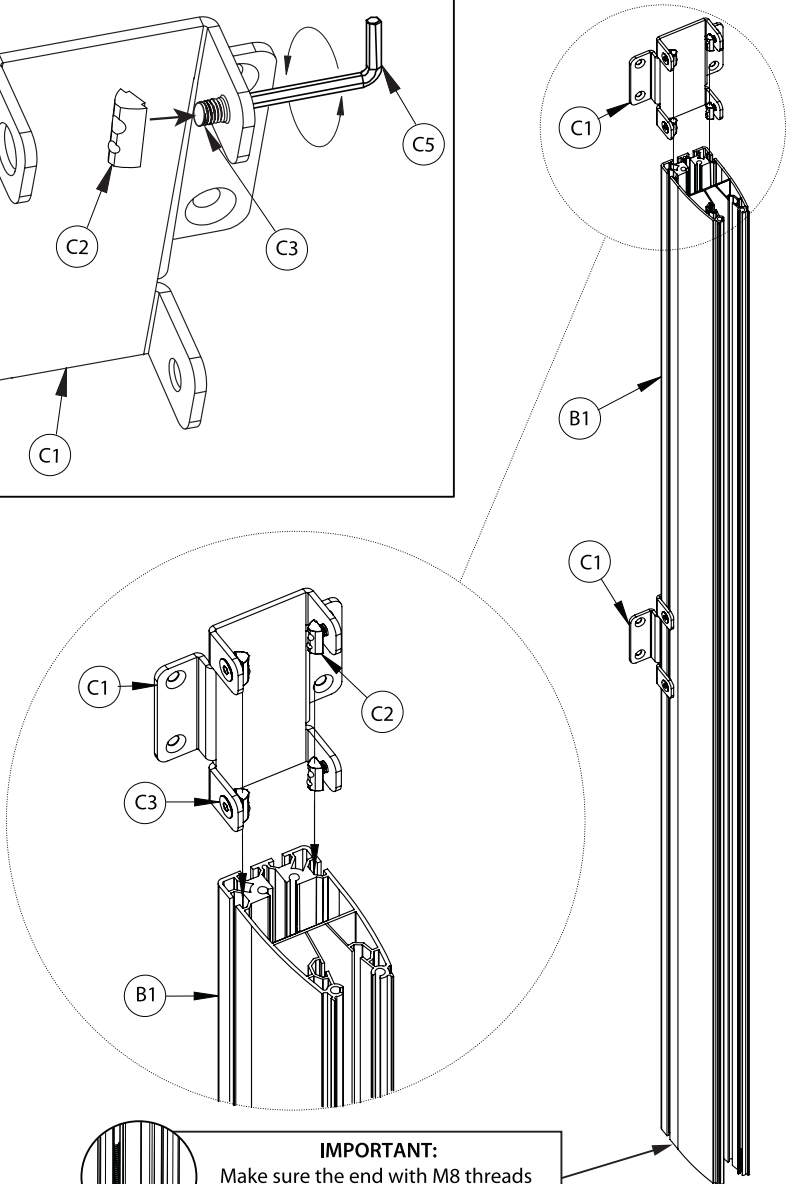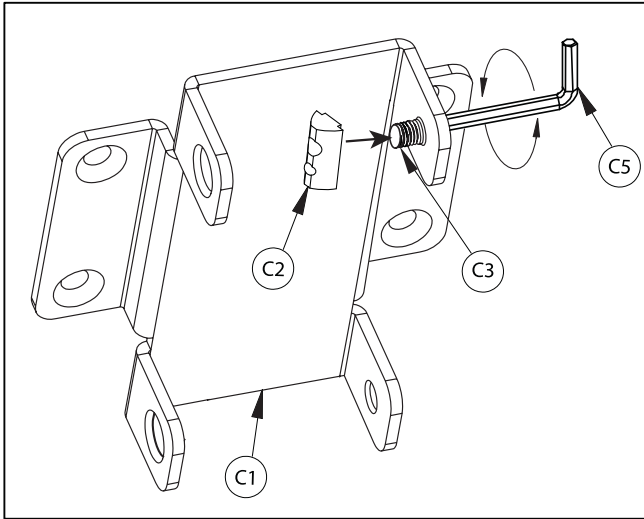


IMPORTANT:
Make sure the end with M8 threads
are at the bottom of the columns.

- iii. Use *item F1* to set the distance between *items C1* on *item B1* according to the screen size.
Once set, tighten *item C3*.

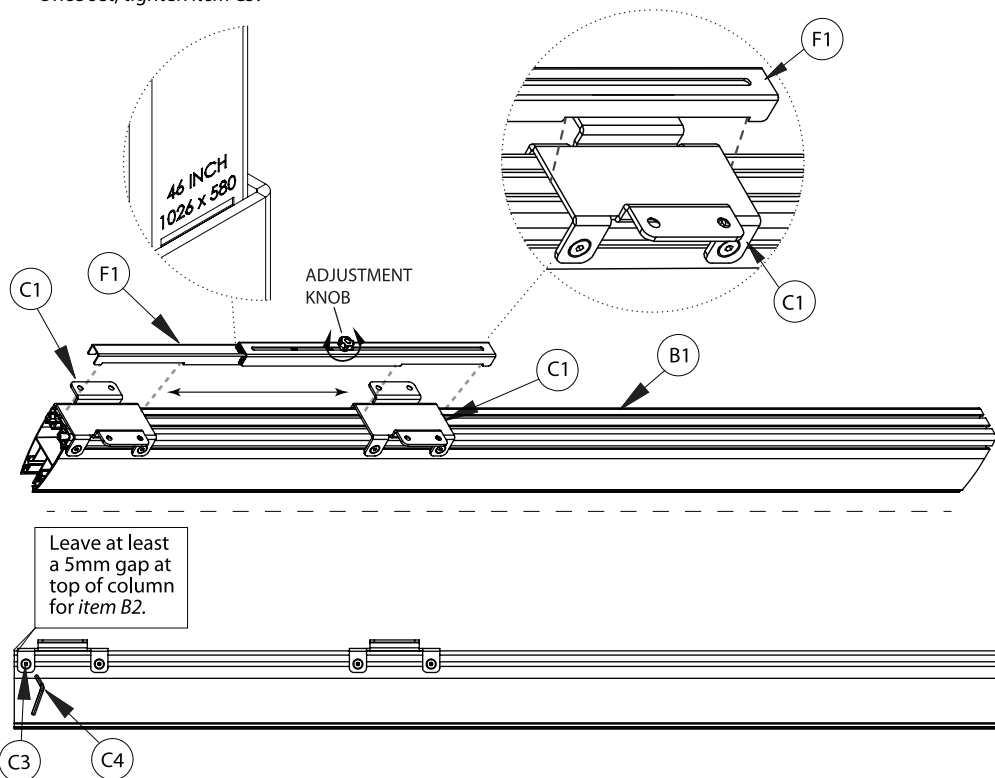

2. INSERT SLIDING NUTS INTO MOUNTING RAILS

- Lay the rail on the floor and for each *item C1* used, insert 4x *item C2* into *item D1*. Two in the 2nd channel and two in the bottom channel.
- To attach *item E1* to the rail, insert 4x *item E5* into the end of *item D1*. Two in each centre channel.

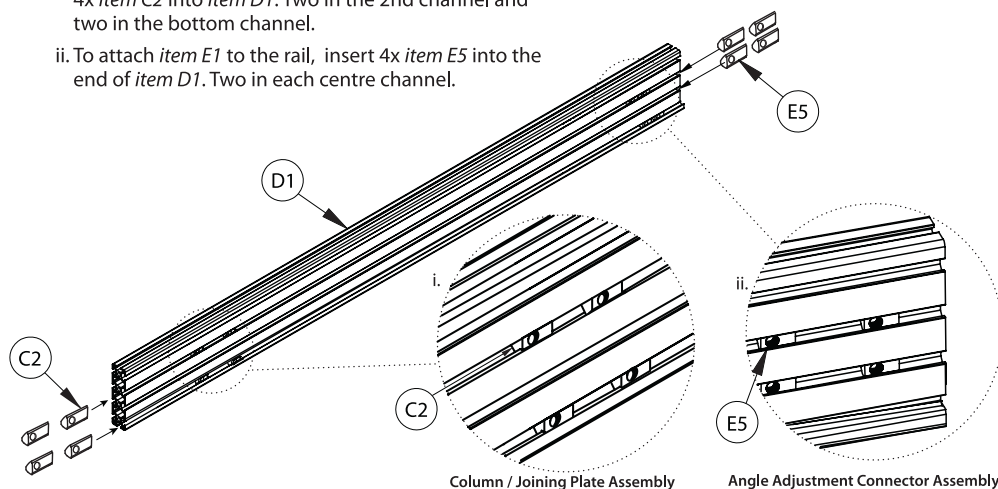


Column / Joining Plate Assembly

Angle Adjustment Connector Assembly

3. CONNECT RAILS TOGETHER USING THE ANGLE ADJUSTMENT


- Assemble items E2 & E3 to item E1. Do not fully tighten the screws and washers.
- With the rails flat on the floor, fix item E1 to 2 x item D1 using items E3, E4 & E5. Make sure all rails are fixed using the same positions on item E1*.

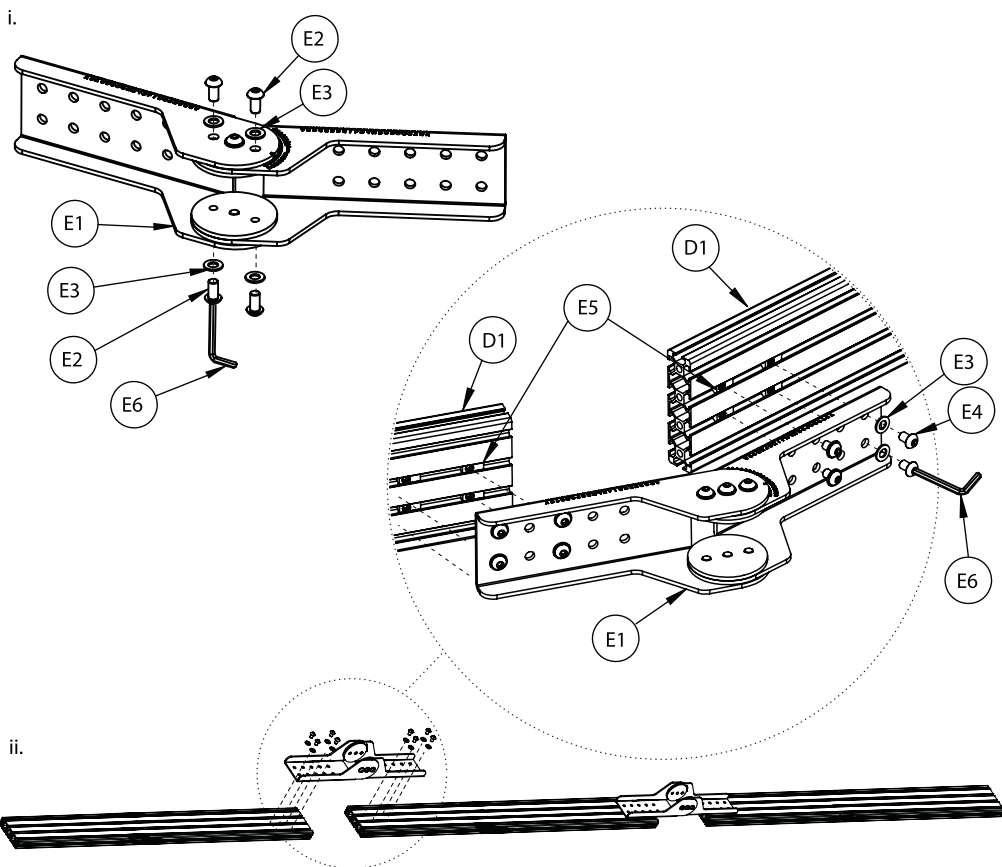

***Note:** The rail fixing positions to use on item E1 are dependent on the size of screens being used.

For help with the rail
fixing position contact:
technical@btechavmounts.co.uk





Please state the screen size,
screen depth, rail length and
curve angle of the installation.

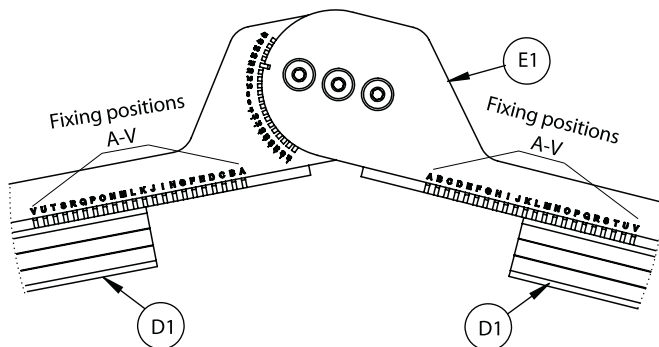

4. ATTACH COLUMNS TO RAILS

On the floor, place *item B1* onto *item D1*. Attach *item C1* to *item D1* by fastening *item C3* into the inserted *items C2*.



Note: To ensure straight assembly of *item B1* make sure the distance of *items C1* to the end of *item D1* are set the same on each rail.

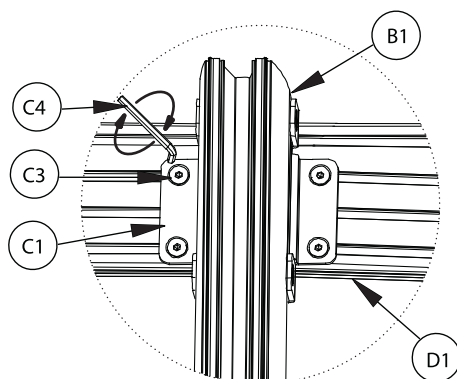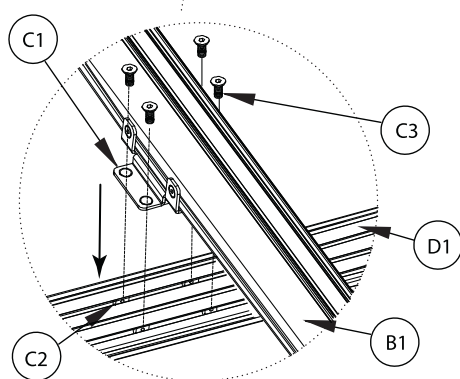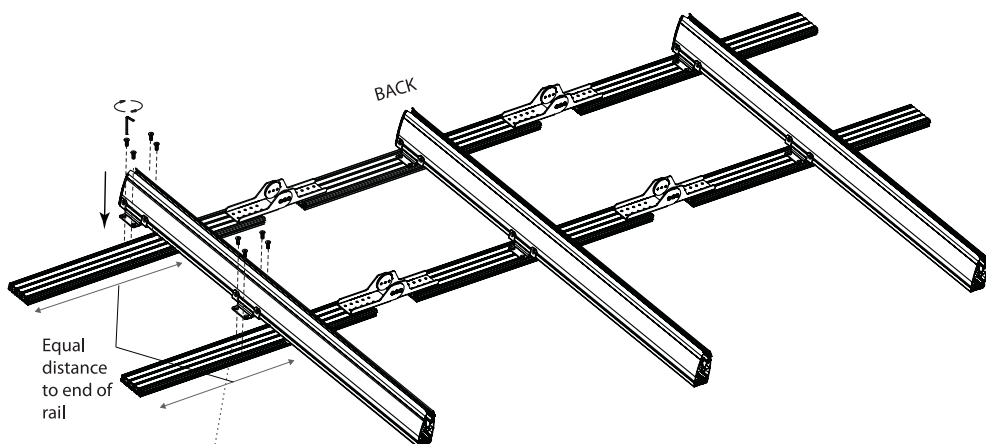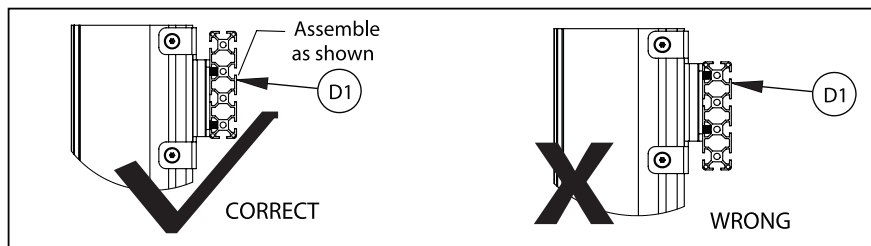


5. ASSEMBLE BASES TO COLUMNS

Attach item A1 to item B1 using items A3 & A4.

Note: Once bases are fixed to columns, return stand to upright position.

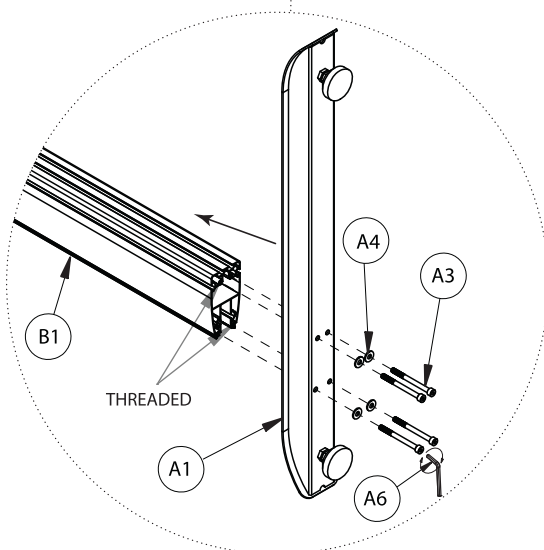
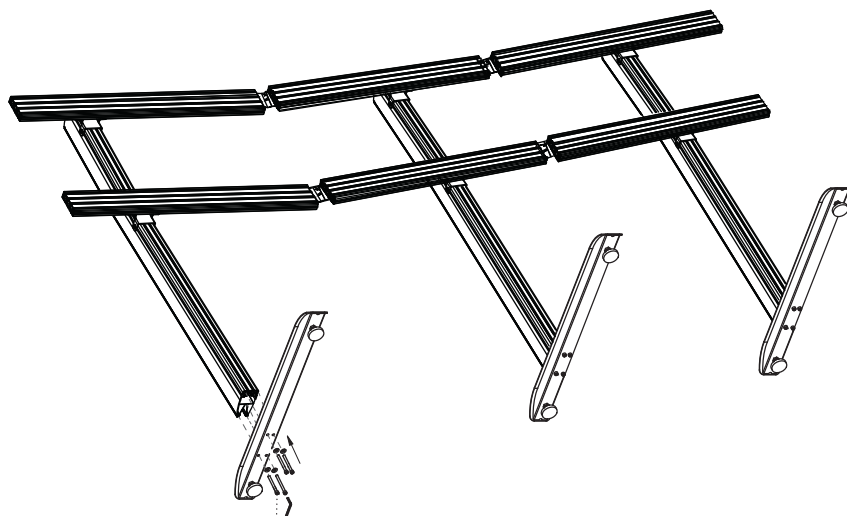


Note: If necessary
use item A5 to
adjust item A2.




6. FIX ANGLE

Set the angle required on *item E1* and fully tighten all screws with *item E6*.

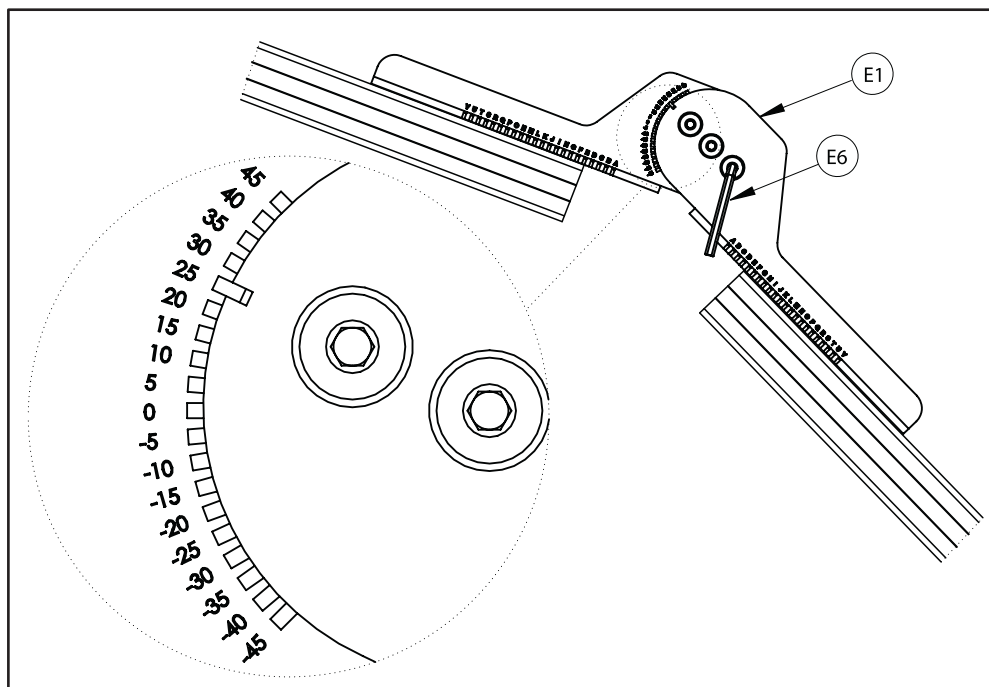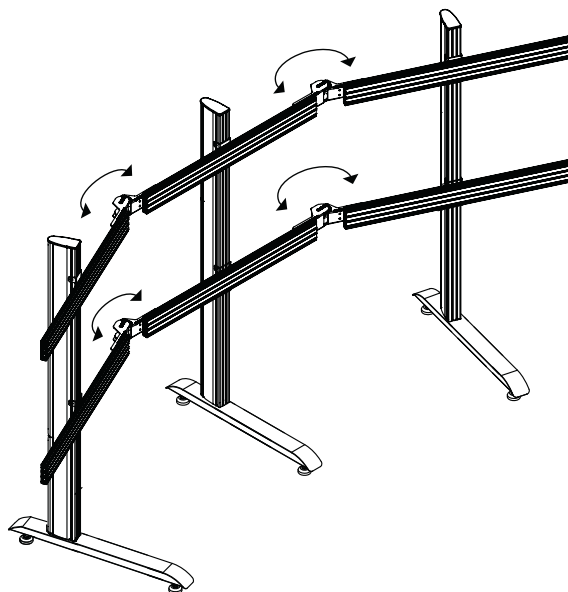


7A. ATTACH INTERFACE ARMS TO SCREEN (BT8390-VESA400MAF ARMS)

Attach *items G1 & G2* to the back of the screens using *items A-F*.

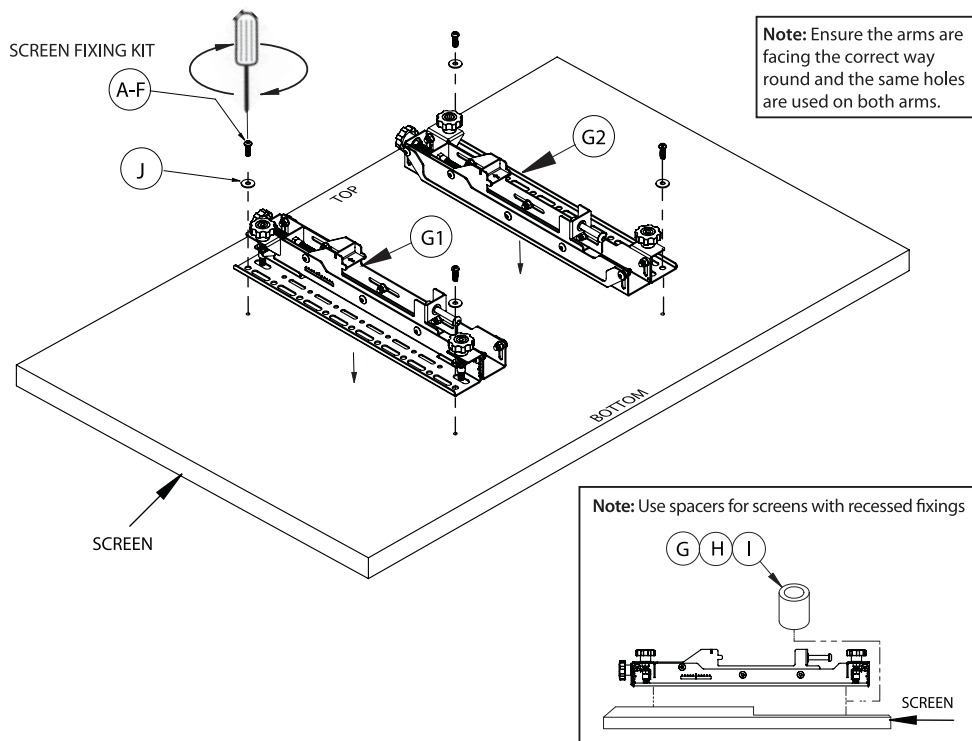


OPTIONAL ADAPTOR ARMS

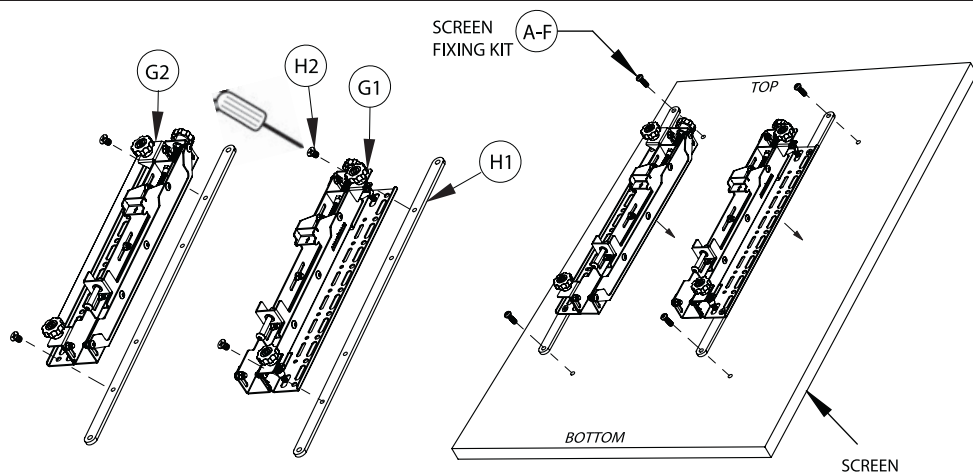


7B. ATTACH POP-OUT INTERFACE ARMS TO SCREENS (BT8390-VESA400MAP ARMS)

i. Attach *items G1 & G2* to the back of the screens using *items A-F*.

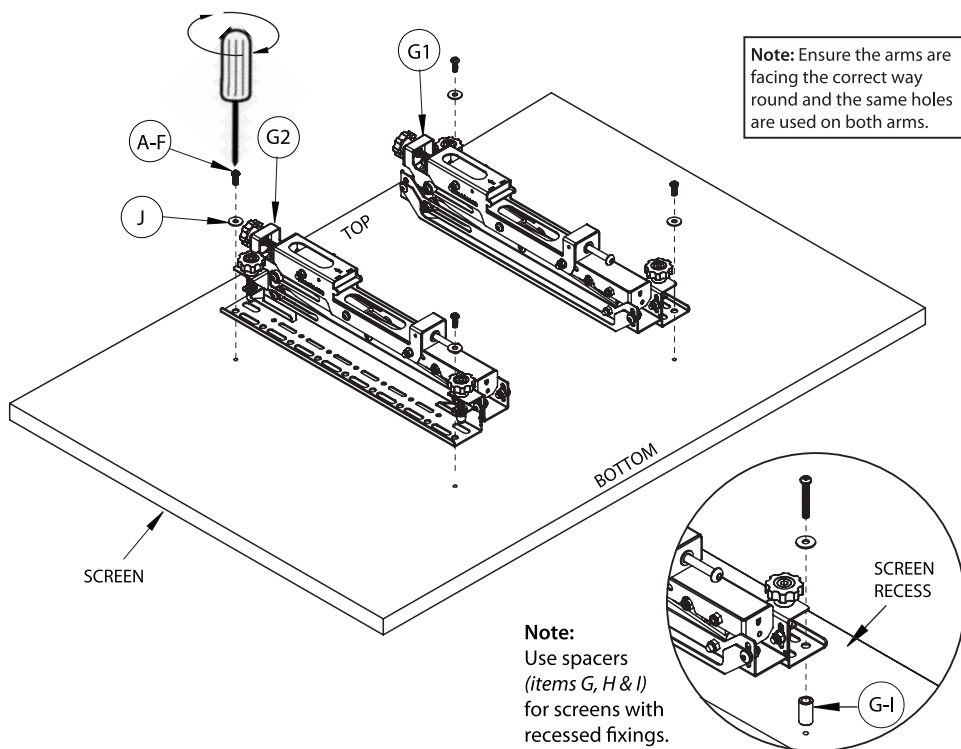

OPTIONAL ADAPTOR ARMS

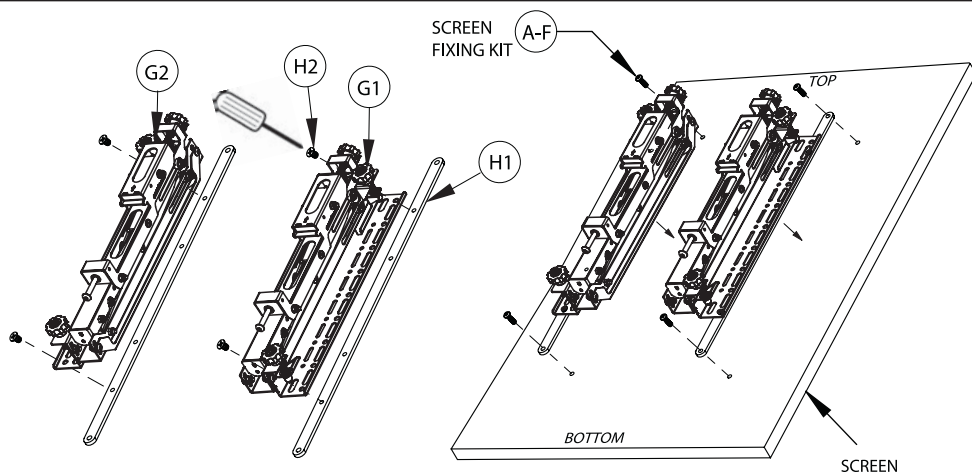


BT8390-VESA400MAP ARMS

ii. Connect interface arms with the adjustable brace.


Extend *item G3* and fix at desired length by tightening the 2 screws.

Note: *Item G3* is only suitable for horizontal VESA fixings between 400 - 600mm.

The 3 notches show the position for interface fixings at 400mm, 500mm and 600mm.


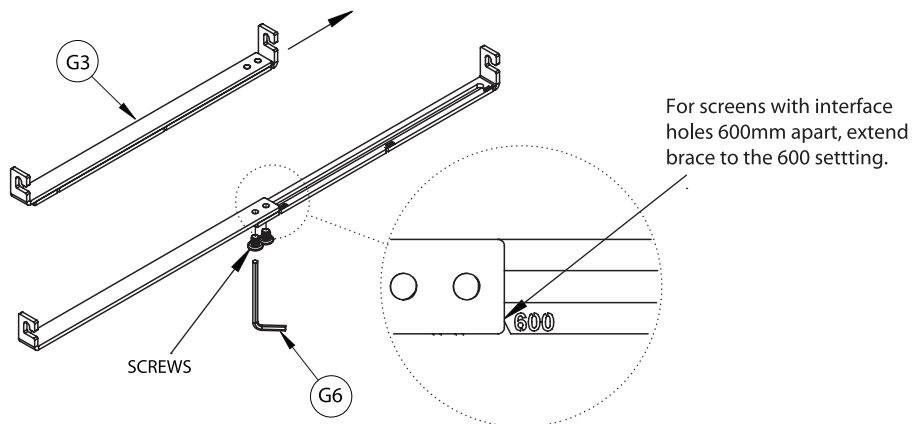


iii. Fix *item G3* to *items G1 & G2* for easy lateral adjustment of screen.

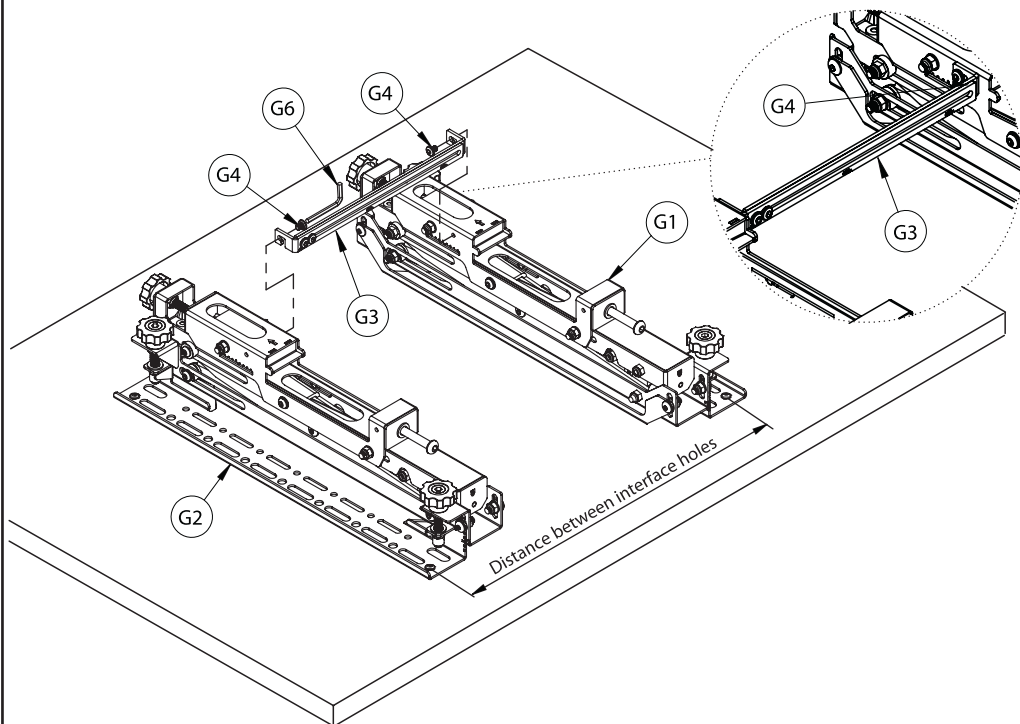


8. HOOK SCREEN ONTO THE STAND

- i. Hook the first screen centrally onto the bottom rail and align screen with the horizontal centre of the stand.

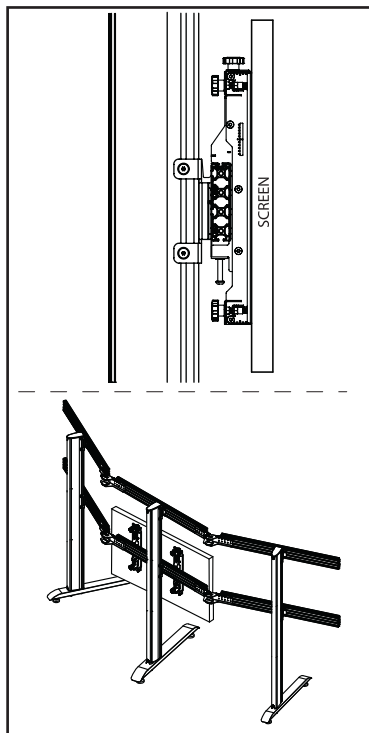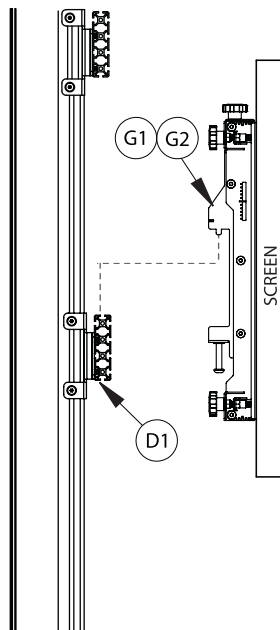

- ii. Align the screen to the floor using the height adjustment (Y Axis) knobs - See page 19.


Note: If mounting 3 or more screens across, mount the first screen centrally onto the bottom rail.

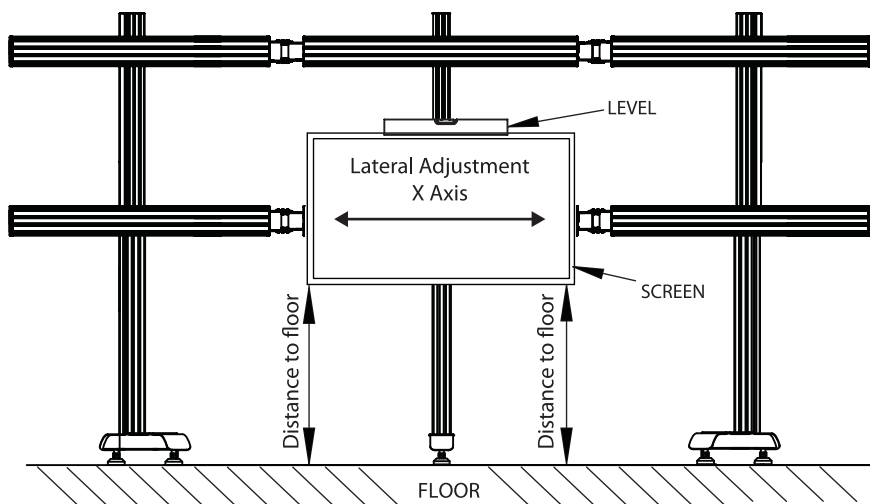

9. MOUNT SCREENS ONTO THE STAND

Hook the remaining screens onto the stand.



Note: A 1mm gap between screens should be maintained.

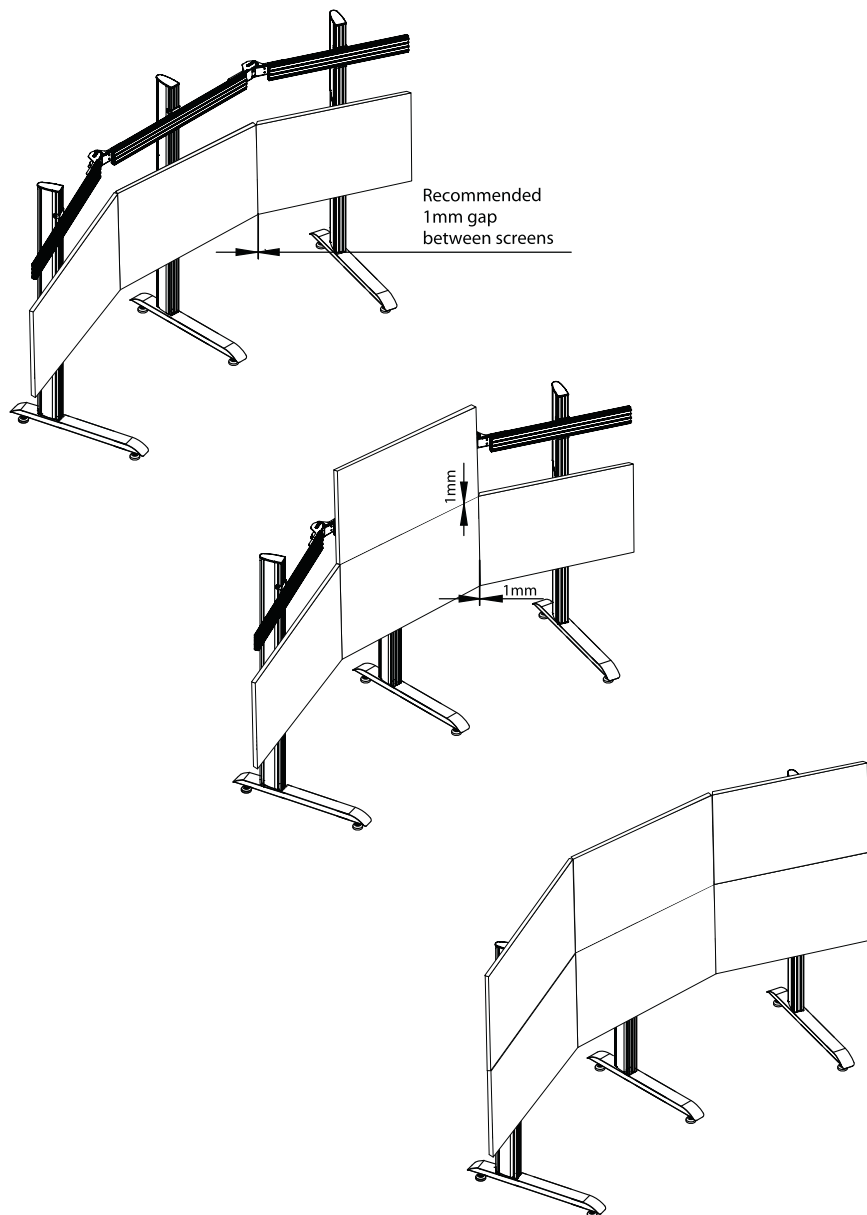


10. ALIGN SCREENS USING MICRO-ADJUSTMENT

- Align the screen to the floor using the height adjustment (Y Axis) knobs.
- Use the depth adjustment (Z Axis) knobs to ensure the screen is perpendicular with the floor and to ensure that each corner of the screen is aligned evenly.


Note: Micro-adjust top row first and work down row by row.

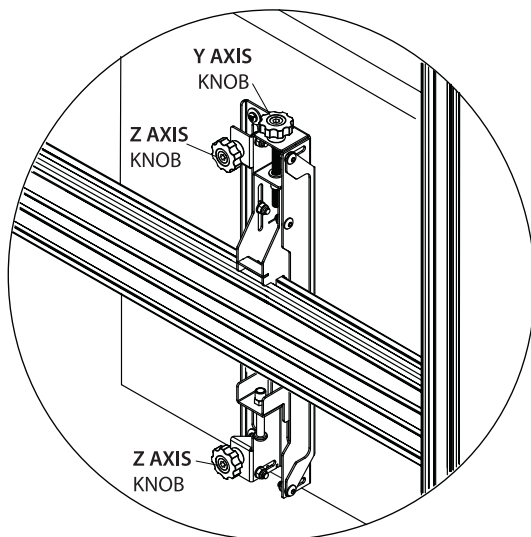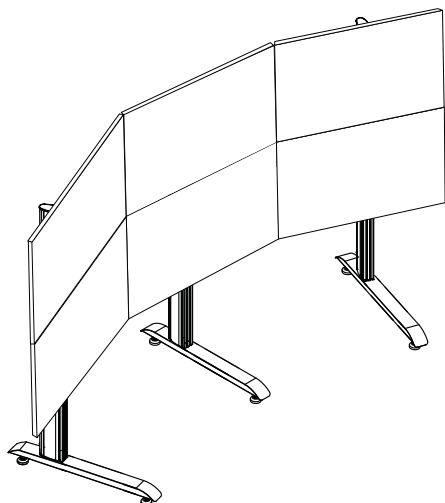




Use **Depth Adjustment**
(Z axis knobs) to align front of screens



Use **Lateral Adjustment**
to align sides of screens



Use **Height Adjustment**
(Y axis knobs) to align bottom/top of screens

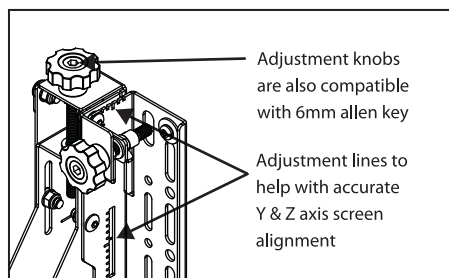

Note: Light pressure in the desired direction of travel will assist in the adjustment of knobs when using heavier screens

BT8390-VESA400MAF



Total Y axis adjustment is +/-25mm
Total Z axis adjustment is 20mm

BT8390-VESA400MAP

Total Y axis adjustment is +/-20mm
Total Z axis adjustment is 20mm

11. SECURE SCREENS

Once screens are aligned, tighten the safety screws on the bottom of *items G1 & G2*.

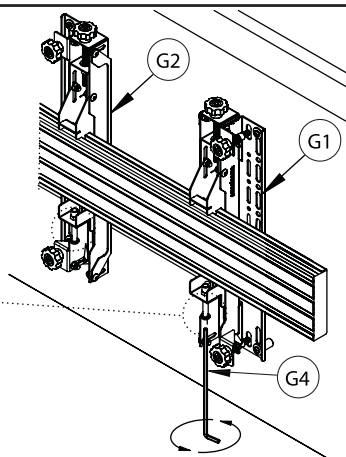


OPERATING INSTRUCTIONS

12. SERVICING SCREENS (POP-OUT ARMS ONLY)

Push centrally at the left and right of the screen to pop-out the mount. The screen will rest in the 'open' position for servicing.


Note: Ensure pop-out function is not disabled - see *below*.

IMPORTANT: Be careful not to damage the screen when pushing. Keep hold of the screen as it moves outwards.

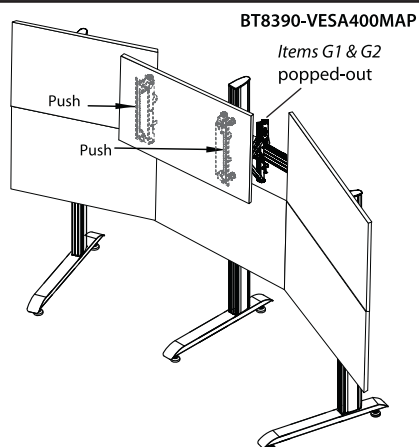

OPTIONAL DISABLING POP-OUT FUNCTION




To prevent interface arms from popping out, fully insert and tighten *item G5* at the padlock* symbol at the bottom of *items G1 & G2*.

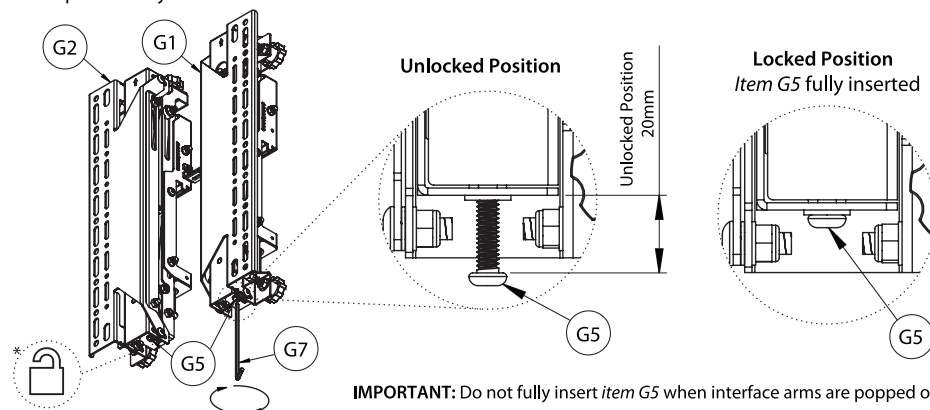

IMPORTANT: Do not fully insert *item G5* when interface arms are popped out.

13. ADD END CAPS & CABLE MANAGEMENT COVERS

- i. Once all the screens and power cables are connected and if possible routed down the back of *item B1*, partially clip on *items B3* (this allows easy removal if more cables need adding). Once satisfied all cables are fitted, clip *item B3* on fully.
- ii. Fit *items D2* to the ends of *items D1*.
- iii. Fit *item B2* to the tops *item B1*.
- iv. With a knife, cut to length *item B4* and slot into the front and sides of *item B1*.

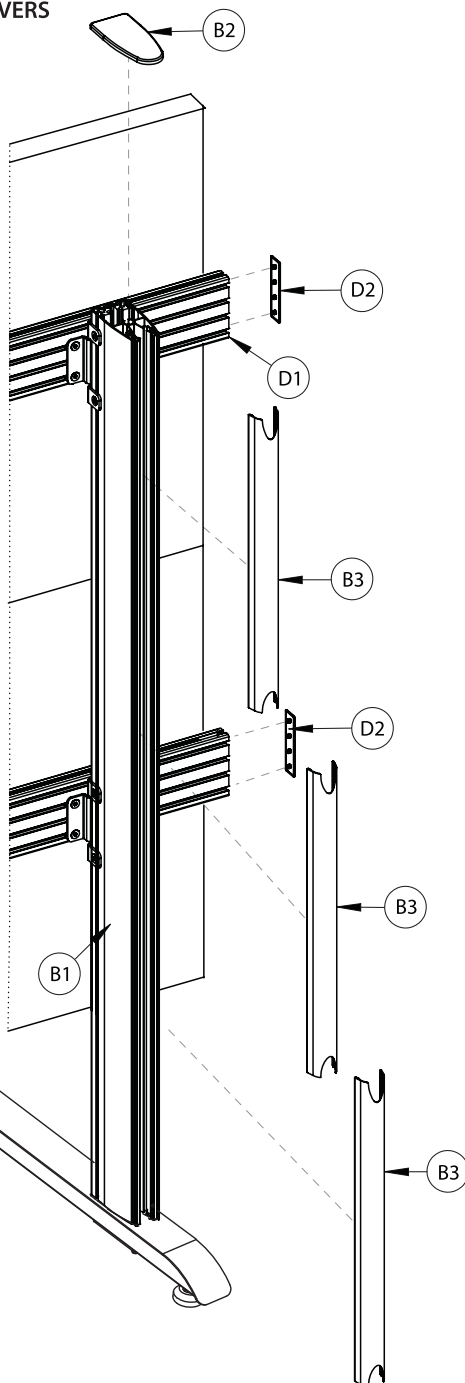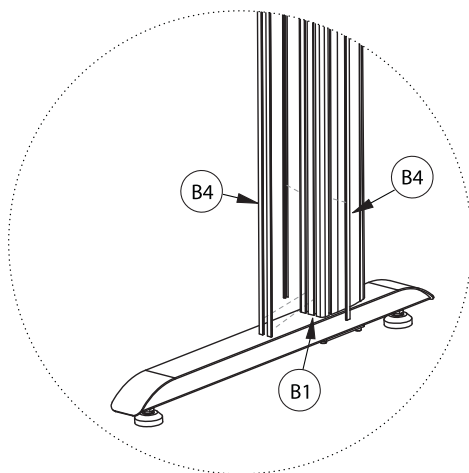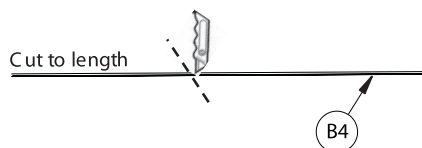


WARNING! Contact a professional AV installer or other suitably qualified person for any further operation or removal of equipment after installation

OPTIONAL COMPONENT ACCESSORIES

OPTIONAL INSTALLING A CAMERA SHELF

- i. Attach item I2 to item I1 using items I4 & I5.
- ii. Attach item J1 to item I2 using items I6 & I7.


Assembly shown for mounting the shelf below the rail / screens.

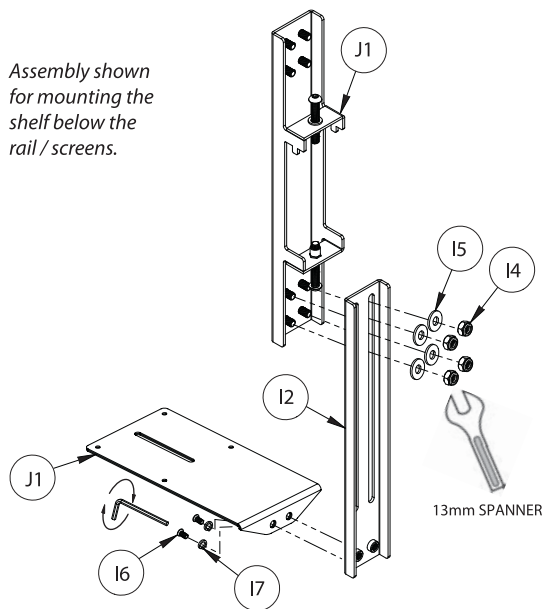


Note: Assemble accessory arm onto the mounting rail before mounting screens to rail.

OPTIONAL ADD EXTENSION BAR

For an extended reach attach item I3 onto item I2.

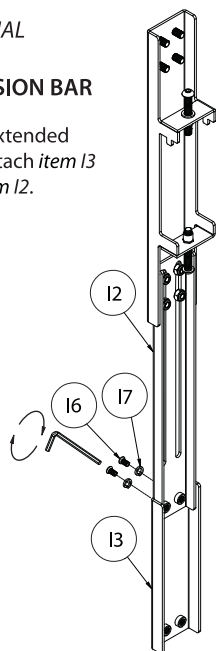


- iii. Hook item I1 onto item D1.

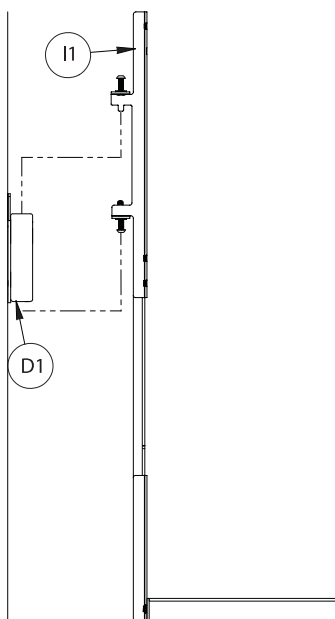

- iv. Secure shelf to rail.

Optional: Level the shelf bracket by using height adjustment screw on item I1.

Use the safety screw underneath the hook arm to secure the shelf bracket to rail.

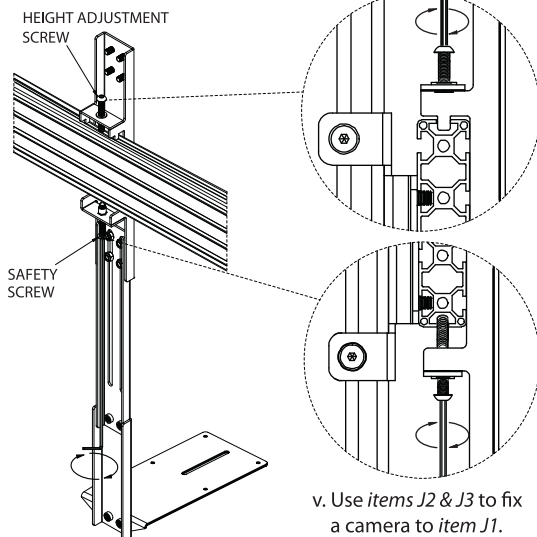


- v. Use items J2 & J3 to fix a camera to item J1.

BT8373 DIMENSIONS


PLEASE KEEP THIS FOR FUTURE REFERENCE

Depending on installation requirements, the BT8373 Curved Videowall Stand will feature a selection of the following products.

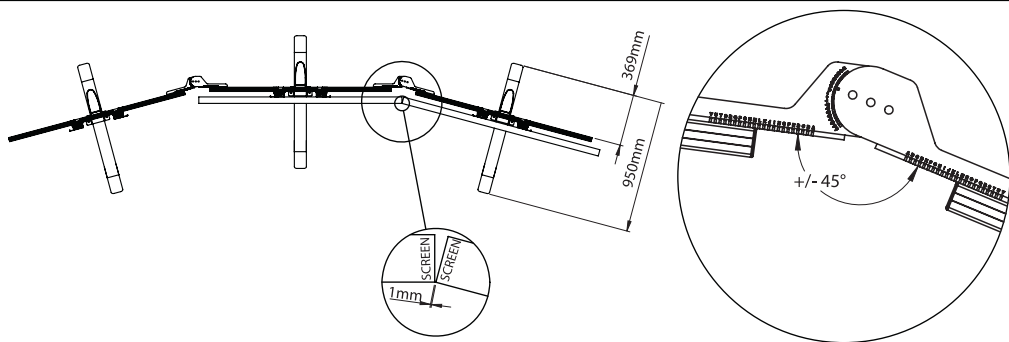



BASE

BT8380-BASE

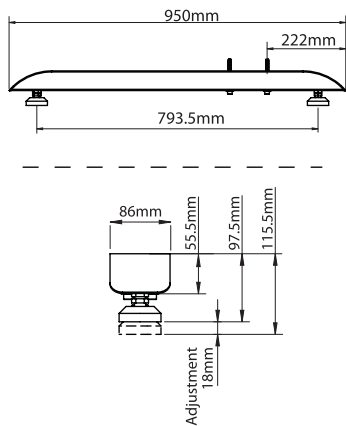



INTERFACE ARMS

BT8390-VESA400MAF

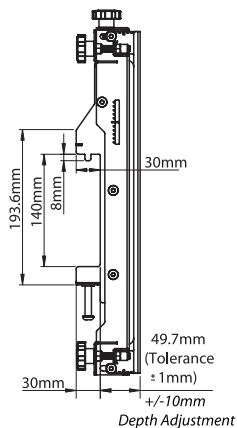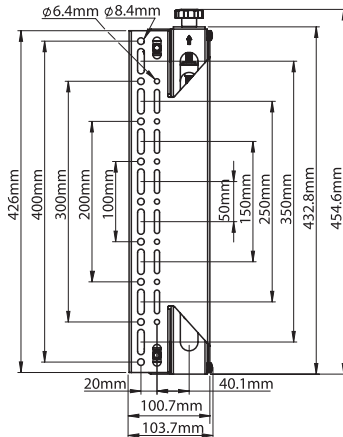

INTERFACE ARMS

BT8390-VESA400MAP

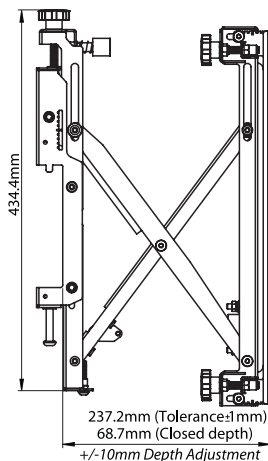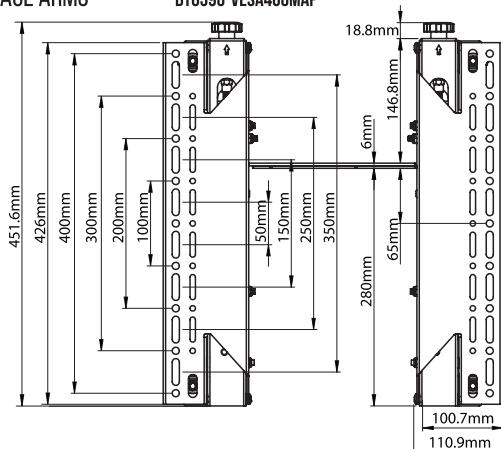

THESE INSTRUCTIONS ARE INTENDED AS A GUIDE ONLY AND B-TECH ACCEPTS NO LIABILITY FOR THE ACCURACY OF THE INFORMATION CONTAINED IN THIS DOCUMENT.



CONTACT:

info@btechavmounts.com

©2022 B-Tech International Design and Manufacturing Ltd. All rights reserved.

B-Tech AV Mounts is a division of B-Tech International Design and Manufacturing Ltd.

B-Tech AV Mounts and the B-Tech logo are registered trade marks.

All other brands and product names are trademarks of their respective owners.

Photographs are for illustrative purposes only. E&OE.

Manufactured by:

B-TECH INTERNATIONAL DESIGN & MANUFACTURING LTD

Unit 26, 22/F Metro Centre II, 21 Lam Ling St., Kowloon Bay, Kowloon, Hong Kong

AMA-BT8373-V1.2-0922-BTECH MADE IN VIETNAM



® For More Information Visit www.btechavmounts.com