

BT8340

UNIVERSAL VIDEOWALL MOUNTING SYSTEM

The BT8340 is a modular wall mounting system for video wall installations of any size. The BT8340 can mount screens in landscape or portrait orientations - perfect for digital signage that needs to stand out. As part of the System X range, the BT8340 can be used in thousands of different configurations and is ordered according to your requirements using B-Tech's online configuration tool (see below, right).

SPECIFICATIONS

Recommended screen size	32" - 75"
Max load	50kg per screen
VESA® & non-VESA fixings	up to 900mm*
Distance from wall (fixed arms)	47mm
Distance from wall (tilt arms)	71.4mm
Distance from wall (micro-adjustment arms)	86mm (+/-10mm)
Colour	Black

FEATURES

- 1 Tool-less micro-adjustment for seamless screen alignment
 - 2 Suitable for landscape or portrait mounting
 - 3 Multiple rail lengths available (rails can also be joined to create larger installs)
 - 4 Can be used to create eye-catching, mosaic style installs
- Can be used in an endless variety of configurations
 - High-end aesthetic quality
 - Safety screws prevent unauthorised removal of screens
 - TUV certified



CREATE YOUR MOUNTING SYSTEM ONLINE

SPECIFY YOUR VIDEO WALL & MENU BOARD REQUIREMENTS ONLINE AND OUR SYSTEM X CONFIGURATION TOOL WILL CREATE A MOUNTING KIT TO SUIT YOUR NEEDS


There are thousands of System X configurations available! Visit our online configuration tool to specify setups, number of screens, number of rows and orientation.

Try now at www.btechavmounts.com/systemx-configurator



SYSTEM 

RECOMMENDED MAX SCREEN	MAX LOAD	MAX VESA	MICRO ADJUSTMENT	POST INSTALL ALIGNMENT	CONFIGURE AS REQUIRED	TUV CERTIFIED	
75" 190cm	50kg	900					




*Refers to maximum vertical fixing dimension for a typical configuration. Correctly sized interface arms and adaptors will be supplied as necessary to suit the mounting pattern you require.

BT8340


CREATING YOUR BT8340 KIT

BT8340 configurations are made to your exact requirements and, as a result, utilise a varying combination of System X components in order to create the perfect solution. Below are technical drawings for the standard components used in every BT8340 configuration: BT8390-VESA400MAF Micro-Adjustment Interface Arms, BT8390-WFK Wall Fixing Kits and BT8390 Mounting Rails (available in the lengths shown). Please visit our System X online configuration tool at www.btechavmounts.com/systemx-configurator to specify your requirements. All dimensions will be automatically calculated and a complete mounting solution with all required parts will be created for you.

BT8390-VESA400MAF INTERFACE ARMS

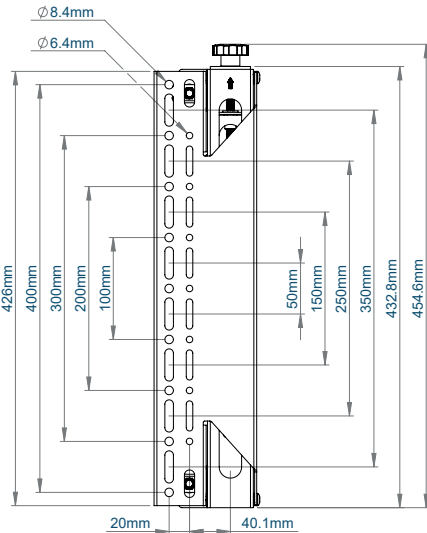


FRONT

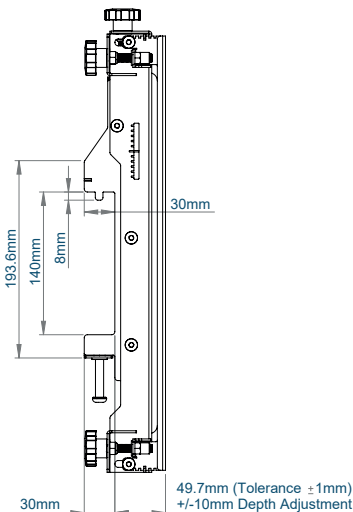

SIDE

BT8390-WFK1 WALL FIXING KIT

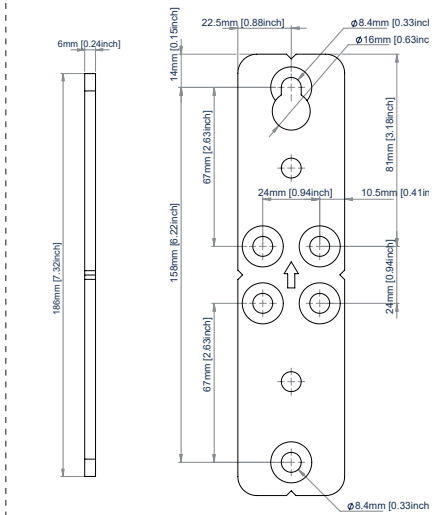


SIDE


FRONT

BT8390 MOUNTING RAILS


BT8390-200

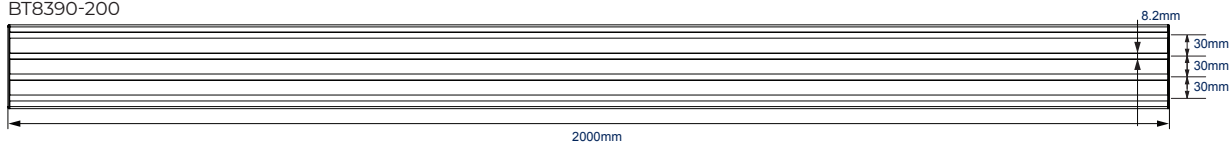


BT8390-175

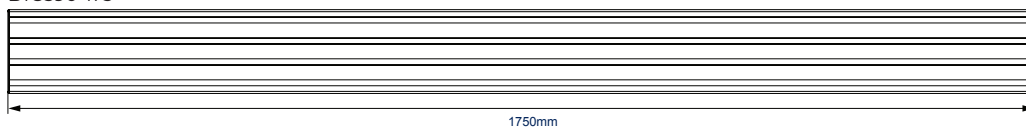


BT8390-150

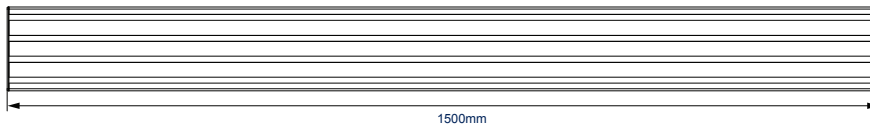


BT8390-030



BT8390-050



BT8390-070

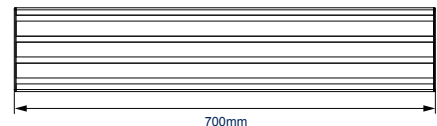

ORDERING INFORMATION

COLOUR	ORDER REF	EAN
Black	BT8340/B	5019318307164

RELATED PRODUCTS

PRODUCT CODE	NAME	DESCRIPTION
BT8330	Universal Menu Board Mounting System	For wall mounted menu board configurations
BT8331	Universal Pop-In, Pop-Out Menu Board System	For menu board configurations
BT8341	Universal Pop-In, Pop-Out Video Wall System	For video wall configurations
BT8342	Universal Ceiling Mounted Video Wall System	For video wall configurations